

RECOMMEND PANEL CUT OUT

RoHS

IP67

REV.	DESCRIPTION	DATE
A	ISSUE	May/22/2014

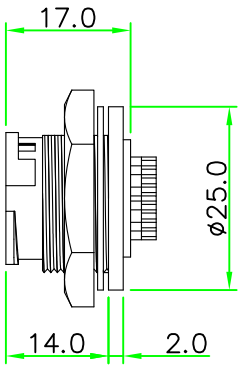



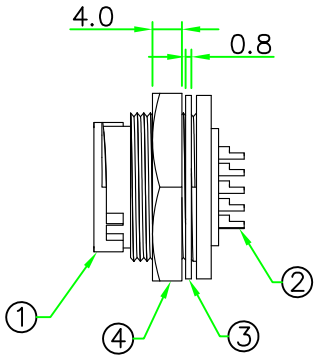

NOTES:

1. ELECTRICAL CHARACTERISTICS:
   CURRENT RATING: 2A / 5A / 10A / 20A
   CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C
   DIELECTRIC WITHSTANDING VOLTAGE:
   500V AC FOR ONE MINUTE
2. HOW TO ORDER: CCx-L1xxCSR

   02 - 2 PIN 09 - 09 PIN
   03 - 3 PIN 10 - 10 PIN
   04 - 4 PIN 12 - 12 PIN
   05 - 5 PIN 14 - 14 PIN
   06 - 6 PIN 18 - 18 PIN

   G - CURRENT RATING 20A
   P - CURRENT RATING 10A
   D - CURRENT RATING 5A
   N - CURRENT RATING 2A

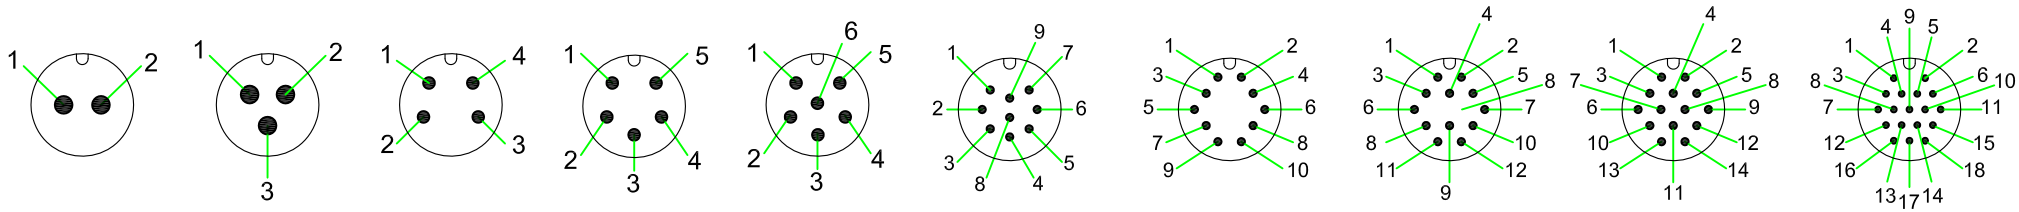

PIN ASSIGNMENT FRONT VIEW
(前視圖)

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
4	HEX NUT	Nylon + GF.	BLACK	1	
3	GASKET	EPDM.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold Plated . Male Contact.		N	
1	CONNECTOR	C Size Male Connector Insert.NYLON+GF.	BLACK	1	

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

UNIT: mm	TITLE : CIRCULAR C SIZE MALE PIN SCREW TYPE ROUND FLANGE REAR PANEL MOUNT SOLDER BUCKET PIN		
SCALE 1:1			
UNLESS OTHERWISE SPECIPED TOLERANCES: x ±0.25 xx ± 0.1 xxx ± 0.05 ANGLE ± 1°	P/N: CCx-L1xxCSR	DR. Patty	
		CH. ERIC	
REV. A	SHEET 1/1	DWG.NO: CCx-L1xxCSR	AP.