
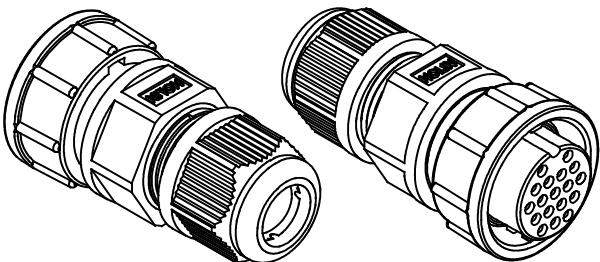
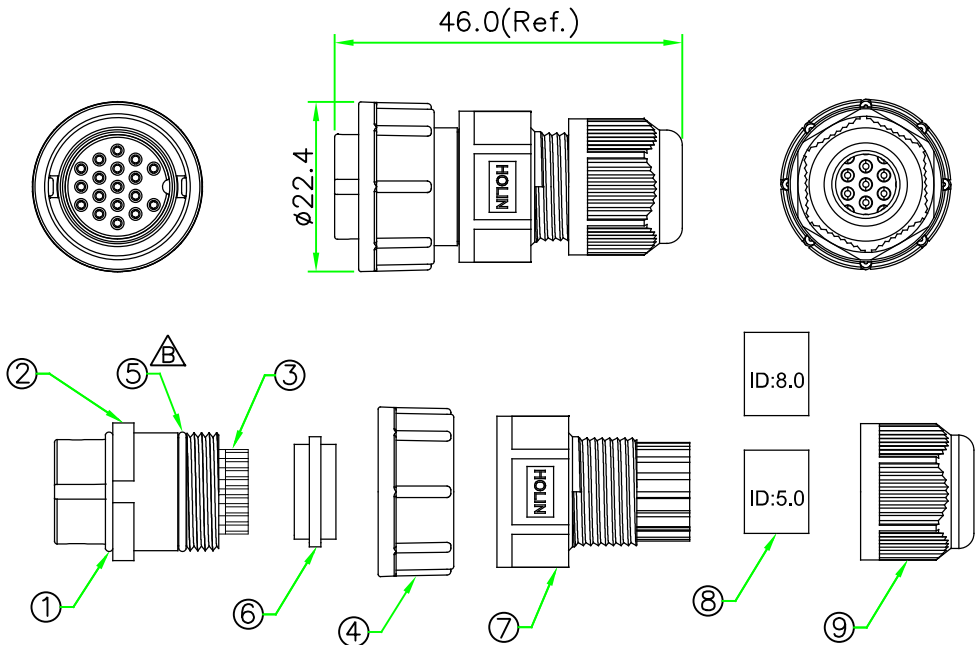



RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Apr/08/2011
A1	ADD PIN ASSIGNMENT.	May/21/2014
A2	Add item & Change packing.	Apr/15/2021
Note1	Correct packing method.	Sep/13/2021
B	Change O-ring (EC-113002), remove△	Aug/14/2024

#2 Zipper PE Bag.

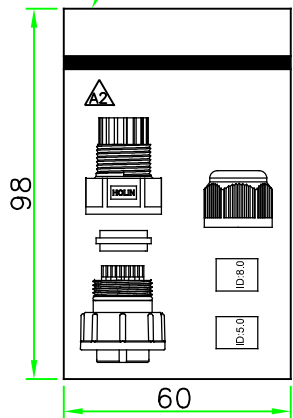

NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 2A / 5A / 10A / 20A
CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. HOW TO ORDER: CCx-L2xxSA
02 - 2 PIN 09 - 09 PIN
03 - 3 PIN 10 - 10 PIN
04 - 4 PIN 12 - 12 PIN
05 - 5 PIN 14 - 14 PIN
06 - 6 PIN 18 - 18 PIN
G - CURRENT RATING 20A
P - CURRENT RATING 10A
D - CURRENT RATING 5A
N - CURRENT RATING 2A

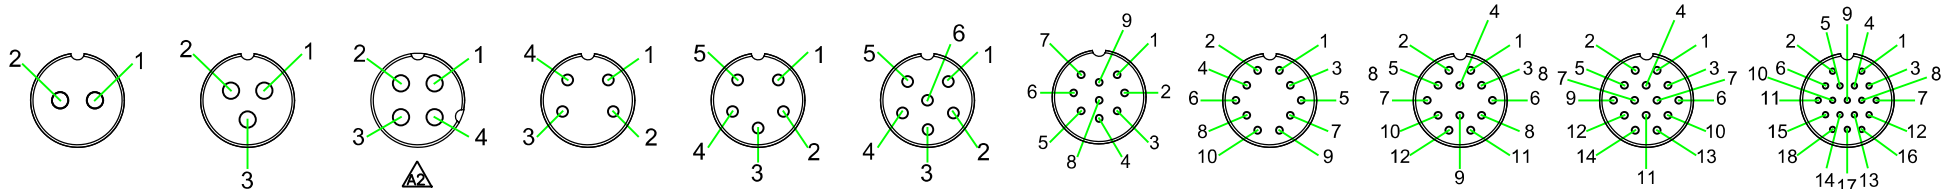

CCG-L202SA CCG-L203SA CCG-L204SA CCP-L204SA CCP-L205SA CCP-L206SA CCD-L209SA CCD-L210SA △CCD-L212SA CCD-L214SA CCN-L218SA

PIN ASSIGNMENT FRONT VIEW (前視圖)

9	CLAMP NUT	NYLON	BLACK	1	
8	TUBE	RUBBER. (Suitable for cable OD= 3~5 & 5 ~ 8mm.)	BLACK	2	
7	HOOD	NYLON	BLACK	1	
6	GASKET	RUBBER.	BLACK	1	
5	O-RING △	NBR.	BLACK	1	O-1212-NK01
4	LOCK NUT	NYLON+GF.	BLACK	1	
3	CONTACT	BRASS, FEMALE CONTACT. 6 u" GOLD PLATED.		N	
2	CONNECTOR	C SIZE FEMALE ONNECTOR INSERT. NYLON+GF.	BLACK	1	
1	O-RING	NBR	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
UNIT: mm	SCALE	TITLE Circular C Size Female Solder Pin Lock type Field Installable Plug			
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX, ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX± 0.1 ANGLE ± 1°	REV.	SHEET	P/N: CCx-L2xxSA		
B	1/1	DWG.NO: CCx-L2xxSA	DR. SIBYL CH. JAMES AP.		