






RoHS



RECOMMENDED  
PANEL CUT OUT

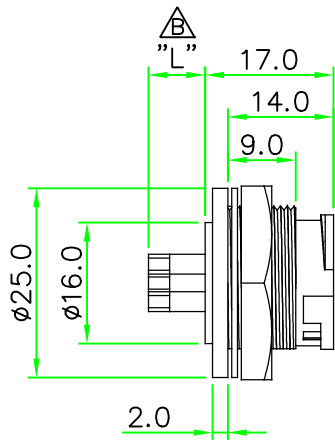

| P/N | L   |
|-----|-----|
| CCG | 7.1 |
| CCP | 7.5 |
| CCD | 5.7 |

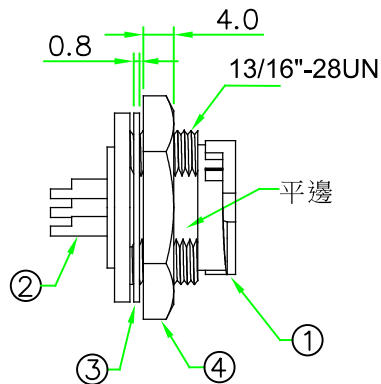


NOTES:


- ELECTRICAL CHARACTERISTICS:  
CURRENT RATING: 5A / 10A / 20A  
CONNECTOR TEMPERATURE RANGE: -25°C TO +85°C  
DIELECTRIC WITHSTANDING VOLTAGE:  
500V AC FOR ONE MINUTE
- PANEL THICKNESS MAX. 4.0 mm
- HOW TO ORDER: CCx-L3xxCSR

03 - 3 PIN  
05 - 5 PIN  
09 - 9 PIN


G - CURRENT RATING 20A  
P - CURRENT RATING 10A  
D - CURRENT RATING 5A



CCG-L303CSR



CCP-L305CSR



CCD-L309CSR

PIN ASSIGNMENT FRONT VIEW

(前視圖)

| 4   | HEX NUT   | Nylon + GF.                               | BLACK | 1    |         |
|-----|-----------|-------------------------------------------|-------|------|---------|
| 3   | GASKET    | EPDM.                                     | BLACK | 1    |         |
| 2   | CONTACT   | Brass , 6 u" Gold Plated. Female Contact. |       | N    |         |
| 1   | CONNECTOR | C Size Male Connector Insert. Nylon+GF.   | BLACK | 1    |         |
| No. | PART NAME | DESCRIPTION                               | COLOR | Q'TY | REMARKS |

| HOLIN® HTP ASIA TECHNOLOGY CO., LTD.<br>禾凌科技股份有限公司                                                  |          |                                                                                                           |  |     |       |
|-----------------------------------------------------------------------------------------------------|----------|-----------------------------------------------------------------------------------------------------------|--|-----|-------|
|                                                                                                     | UNIT: mm | TITLE Circular C Size Male Connector Female Pin<br>Rear Mount Lock Type Round Flange<br>Solder Bucket Pin |  |     |       |
| SCALE                                                                                               | 1:1      |                                                                                                           |  |     |       |
| UNLESS OTHERWISE SPECIFIED TOLERANCES:<br>.XX ± 0.5<br>.X ± 0.5 .XX ± 0.25<br>.XXX ± 0.1 ANGLE ± 1° |          | P/N: CCx-L3xxCSR                                                                                          |  | DR. | SIBYL |
| REV. B                                                                                              |          | SHEET 1/1                                                                                                 |  | CH. | JAMES |
|                                                                                                     |          | DWG.NO: CCx-L3xxCSR                                                                                       |  | AP. |       |