



RoHS

IP66

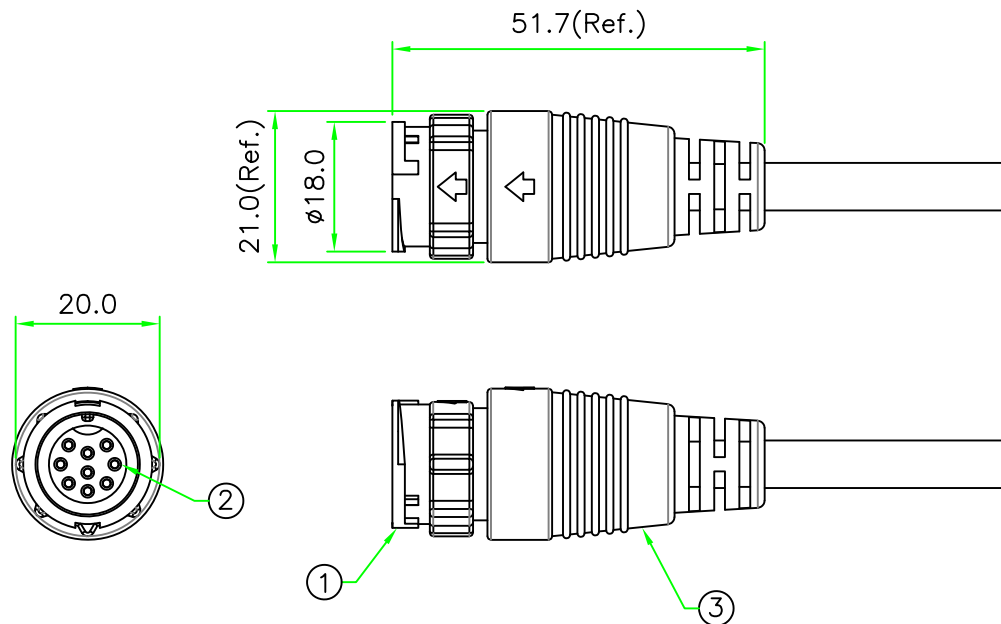

REV	DESCRIPTION	DATE
A	ISSUE	Nov/07/2019

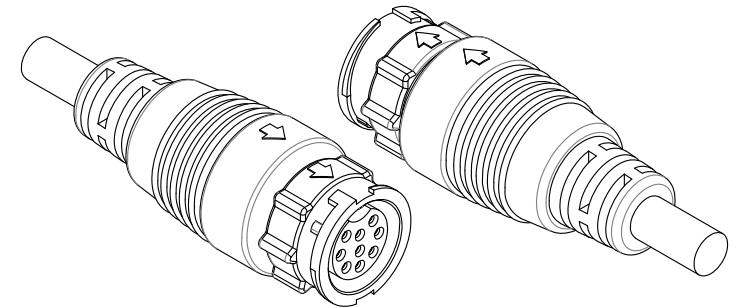

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 5A / 10A / 20A

CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: CCx-L3xxSM

03 - 3 PIN


05 - 5 PIN

09 - 9 PIN


G - CURRENT RATING 20A

P - CURRENT RATING 10A


D - CURRENT RATING 5A



CCG-L303SM



CCP-L305SM



CCD-L309SM

PIN ASSIGNMENT FRONT VIEW
(前視圖)

*Cable specification and length can be customized.

3	OVERMOLD	PVC or PU.	BLACK	1	
2	CONTACT	Brass, 6 u" Gold Plated. Female Contact.		N	
1	CONNECTOR	C Size Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN [®] HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
		UNIT: mm	TITLE : Circular C Size Lock Type Male Connector Female Pin Molded Cable		
SCALE		1:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°		P/N: CCx-L3xxSM		DR.	SIBYL
REV.		SHEET 1/1		CH.	JAMES
A		DWG.NO: CCx-L3xxSM		AP.	