

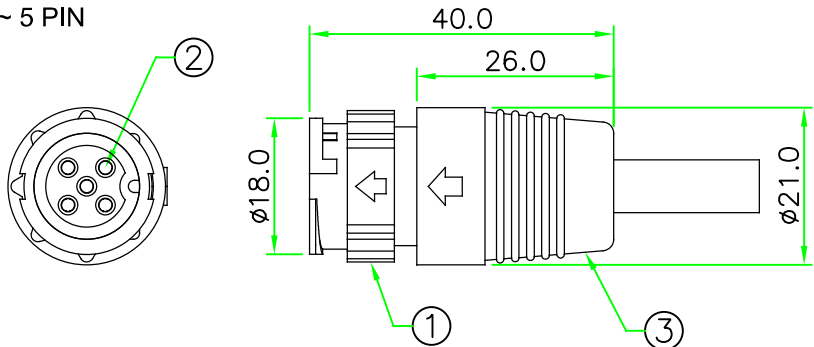


RoHS

FOR 3 ~ 5 PIN

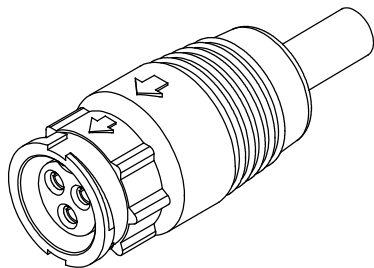

FOR 9 PIN

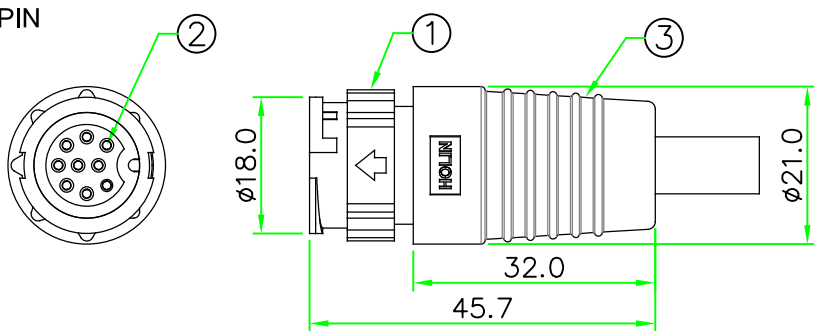


NOTES:

1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 5A / 10A / 20A
CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. HOW TO ORDER: CCx-L3xxSN

03 - 3 PIN
05 - 5 PIN
09 - 9 PIN

G - CURRENT RATING 20A
P - CURRENT RATING 10A
D - CURRENT RATING 5A

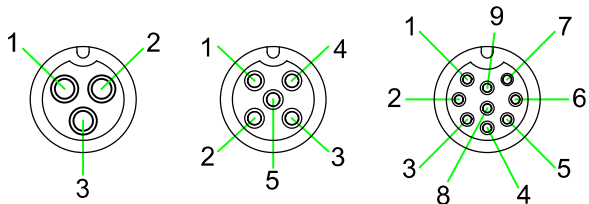

CCG-L303SN CCP-L305SN CCD-L309SN

PIN ASSIGNMENT FRONT VIEW (前視圖)

3	OVERMOLD	PVC or PU.	BLACK	1	
2	CONTACT	Brass, 6u" Gold Plated. Male Contact.		N	
1	CONNECTOR	C Size Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE : Circular C Size Lock Type Male Connector Female Pin Molded Cable		
SCALE	1:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX, ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ± 1°		P/N: CCx-L3xxSN		DR. SIBYL
REV. A	SHEET 1/1	DWG.NO: CCx-L3xxSN		CH. JAMES
				AP.