

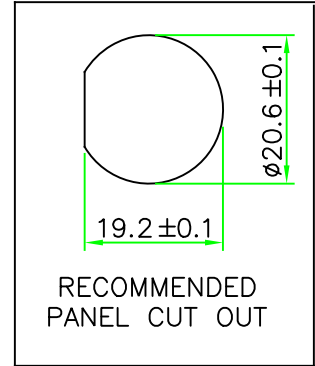



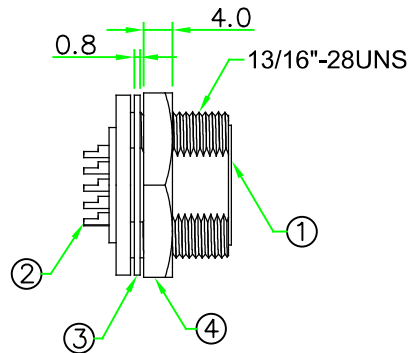


RoHS

| P/N | "L" |
|-----|-----|
| CCG | 9.5 |
| CCP | 8.1 |
| CCD | 2.5 |
| CCN | 3.5 |






| REV.  | DESCRIPTION      | DATE        |
|-------|------------------|-------------|
| A     | ISSUE            | Nov/09/2015 |
| NOTE1 | Add CCG 4P Spec. | Apr/29/2024 |

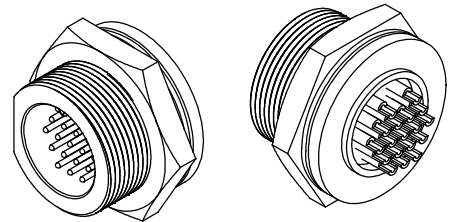

- NOTES:
- ELECTRICAL CHARACTERISTICS:  
CURRENT RATING: 2A / 5A / 10A / 20A  
CONNECTOR TEMPERATURE RANGE: -25°C TO +85°C  
DIELECTRIC WITHSTANDING VOLTAGE:  
500V AC FOR ONE MINUTE
  - HOW TO ORDER: CCx-L1xxCSR

- 02 - 2 PIN    09 - 09 PIN  
03 - 3 PIN    10 - 10 PIN  
04 - 4 PIN    12 - 12 PIN  
05 - 5 PIN    14 - 14 PIN  
06 - 6 PIN    18 - 18 PIN
- G - CURRENT RATING 20A  
P - CURRENT RATING 10A  
D - CURRENT RATING 5A  
N - CURRENT RATING 2A

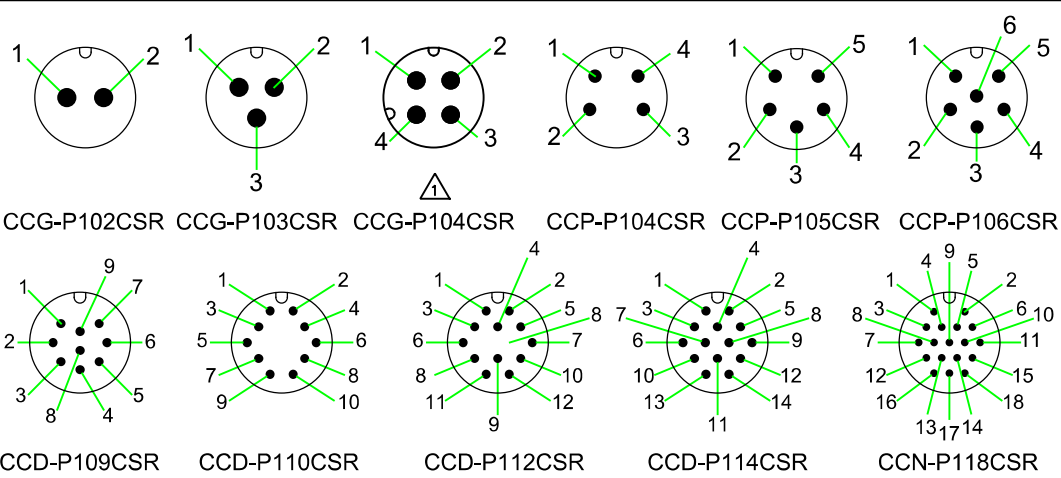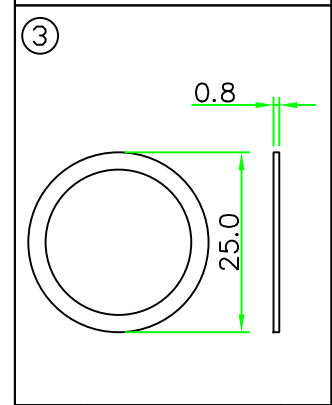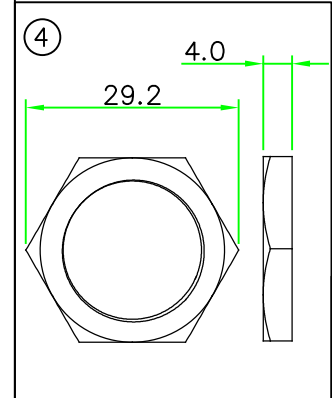

PIN ASSIGNMENT FRONT VIEW (前視圖)

|     |           |                                         |       |      |         |
|-----|-----------|-----------------------------------------|-------|------|---------|
| 4   | HEX NUT   | NYLON+GF.                               | BLACK | 1    |         |
| 3   | GASKET    | EPDM.                                   | BLACK | 1    |         |
| 2   | CONTACT   | Brass, 6 u" Gold Plated. Male Contact.  |       | N    |         |
| 1   | CONNECTOR | C Size Male Connector Insert. NYLON+GF. | BLACK | 1    |         |
| No. | PART NAME | DESCRIPTION                             | COLOR | Q'TY | REMARKS |

|                                                                                                    |           |                                                                                                          |           |
|----------------------------------------------------------------------------------------------------|-----------|----------------------------------------------------------------------------------------------------------|-----------|
| HOLIN® HTP ASIA TECHNOLOGY CO., LTD.<br>禾凌科技股份有限公司                                                 |           |                                                                                                          |           |
|               | UNIT: mm  | TITLE Circular C Size Male Connector Male Pin<br>Rear Mount Screw Type Round Flange<br>Solder Bucket Pin |           |
| SCALE 1:1                                                                                          |           |                                                                                                          |           |
| UNLESS OTHERWISE SPECIFIED TOLERANCES:<br>XX, ± 0.5<br>.X ± 0.5 .XX ± 0.25<br>.XXX± 0.1 ANGLE ± 1° |           | P/N: CCx-P1xxCSR                                                                                         | DR. SIBYL |
|                                                                                                    |           |                                                                                                          | CH. JAMES |
| REV. A                                                                                             | SHEET 1/1 | DWG.NO: CCx-P1xxCSR                                                                                      | AP.       |