

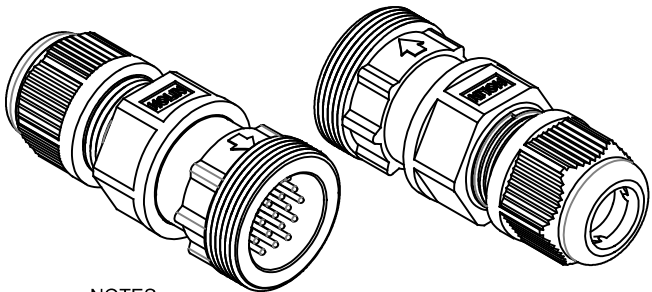


RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Jun/04/2024

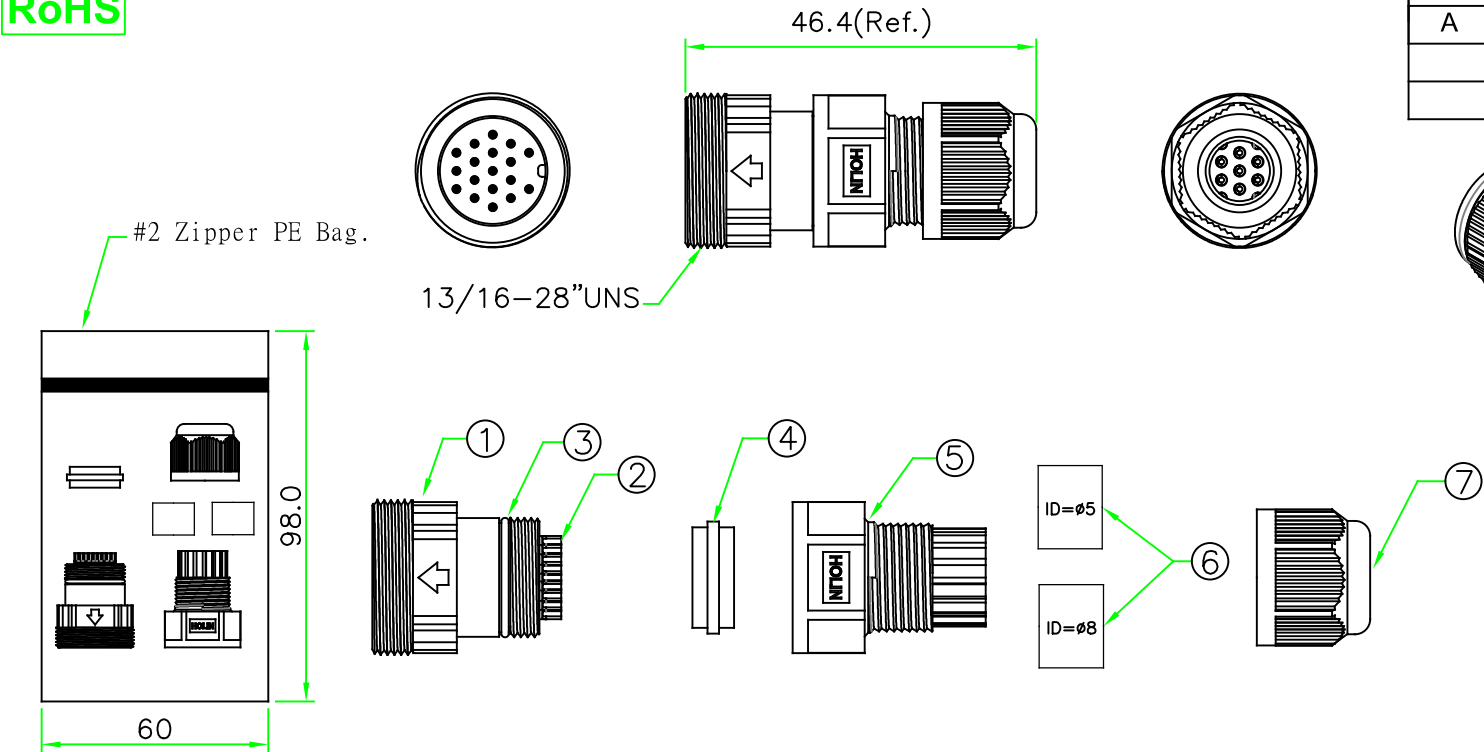

- NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 2A / 5A / 10A / 20A
CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. HOW TO ORDER: CCx-P1xxSA
- 02 - 2 PIN 09 - 9 PIN
 - 03 - 3 PIN 10 - 10 PIN
 - 04 - 4 PIN 12 - 12 PIN
 - 05 - 5 PIN 14 - 14 PIN
 - 06 - 6 PIN 18 - 18 PIN
- G - CURRENT RATING 20A
P - CURRENT RATING 10A
D - CURRENT RATING 5A
N - CURRENT RATING 2A

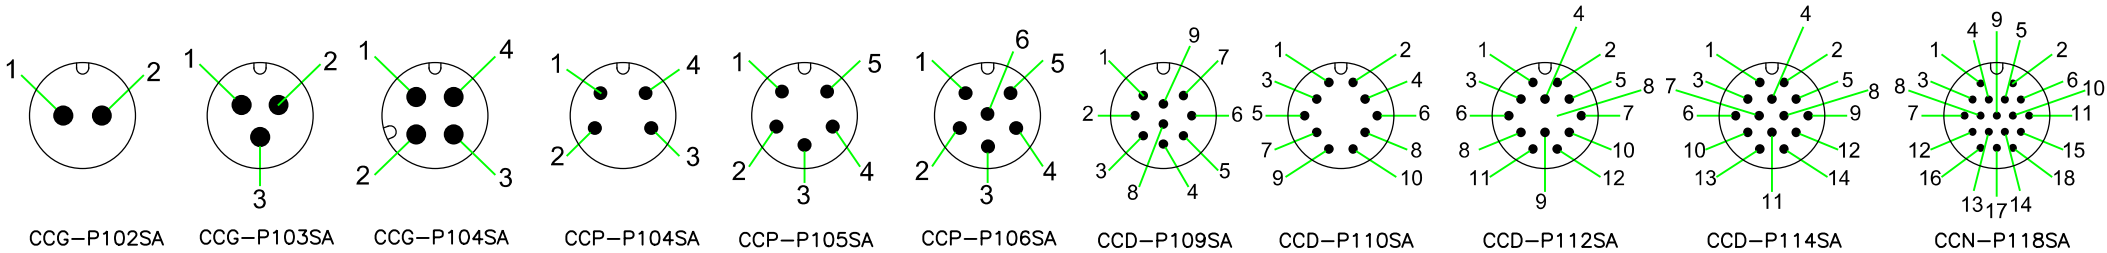

PIN ASSIGNMENT FRONT VIEW (前視圖)

7	CLAMP NUT	Nylon+GF.	BLACK	1	
6	TUBE	Rubber (ID= 5.0 & 8.0mm)	BLACK	2	
5	HOOD	Nylon.	BLACK	1	
4	GASKET	EPDM.	BLACK	1	
3	O-RING	NBR.	BLACK	1	
2	CONTACT	Brass, 6 u" Gold Plated. Male Contact.		N	
1	CONNECTOR	C Size Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.			
禾凌科技股份有限公司			
	UNIT: mm	TITLE Circular C Size Screw Type Male Connector Male Pin Field Installable Plug	
SCALE	1:1		
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX, ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX± 0.1 ANGLE ± 1°		P/N: CCx-P1xxSA	DR. SIBYL
			CH. JAMES
REV. A	SHEET 1/1	DWG.NO: CCx-P1xxSA	AP.