


[illegible]

— G - CURRENT RATING 20A
P - CURRENT RATING 10A
D - CURRENT RATING 5A
N - CURRENT RATING 2A

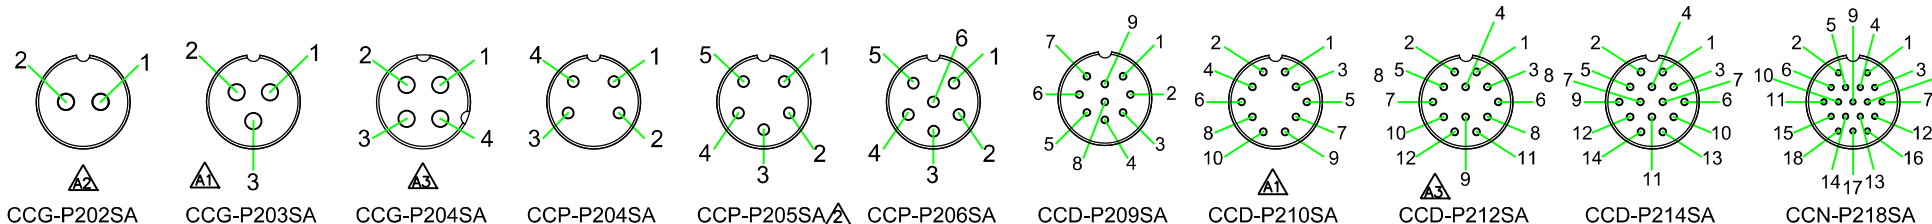

9	CLAMP NUT	NYLON	BLACK	1	
8	TUBE	RUBBER. (Suitable for cable OD= 3~5 & 5 ~ 8mm.)	BLACK	2	
7	HOOD	NYLON	BLACK	1	
6	GASKET	RUBBER.	BLACK	1	
5	O-RING	NBR.	BLACK	1	
4	SCREW NUT	NYLON+GF.	BLACK	1	△
3	CONTACT	BRASS, FEMALE CONTACT. 6 u" GOLD PLATED.		N	
2	CONNECTOR	C SIZE FEMALE ONNECTOR INSERT.NYLON+GF.	BLACK	1	
1	O-RING	NBR	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

	UNIT: mm	TITLE Circular C Size Female Solder Pin Screw type Field Installable Plug	
SCALE	1:1		
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX, ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX± 0.1 ANGLE ± 1°	P/N:	CCx-P2xxSA	DR. SIBYL
			CH. JAMES
REV. A3	SHEET 1/1	DWG.NO: CCx-P2xxSA	AP.