



RoHS

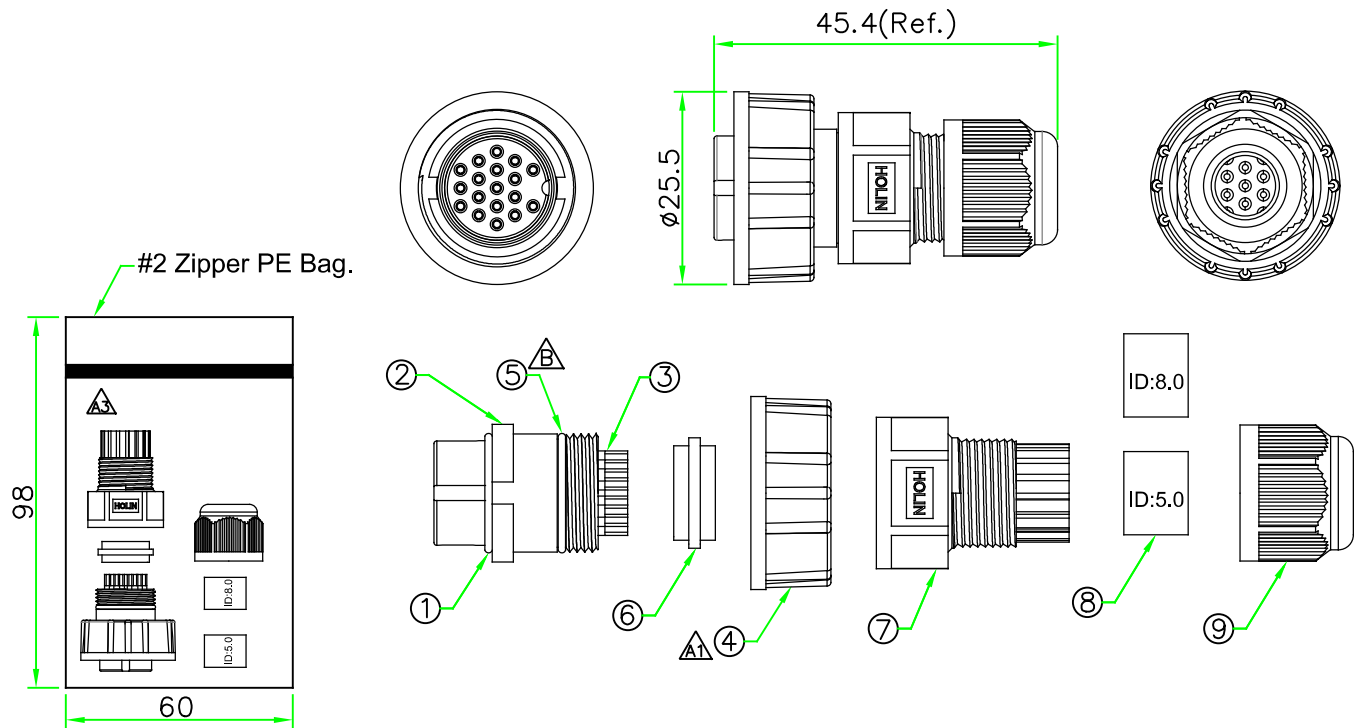


REV.	DESCRIPTION	DATE
A	ISSUE	Apr/08/2011
A1	Change screw nut shape & pin assignment	Mar/27/2014
A2	Add item.	Apr/15/2016
A3	Add item & Change packing method.	Apr/15/2021
Note2	Correct dimension & typo.	Mar/13/2024
B	Change O-ring (EC-113002), remove	Aug/14/2024

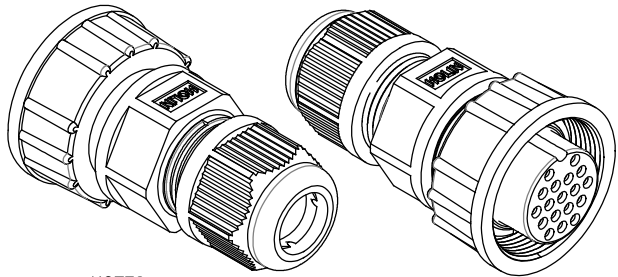

NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 2A / 5A / 10A / 20A
CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. HOW TO ORDER: CCx-P2xxSA

02 - 2 PIN 09 - 09 PIN
03 - 3 PIN 10 - 10 PIN
04 - 4 PIN 12 - 12 PIN
05 - 5 PIN 14 - 14 PIN
06 - 6 PIN 18 - 18 PIN

G - CURRENT RATING 20A
P - CURRENT RATING 10A
D - CURRENT RATING 5A
N - CURRENT RATING 2A

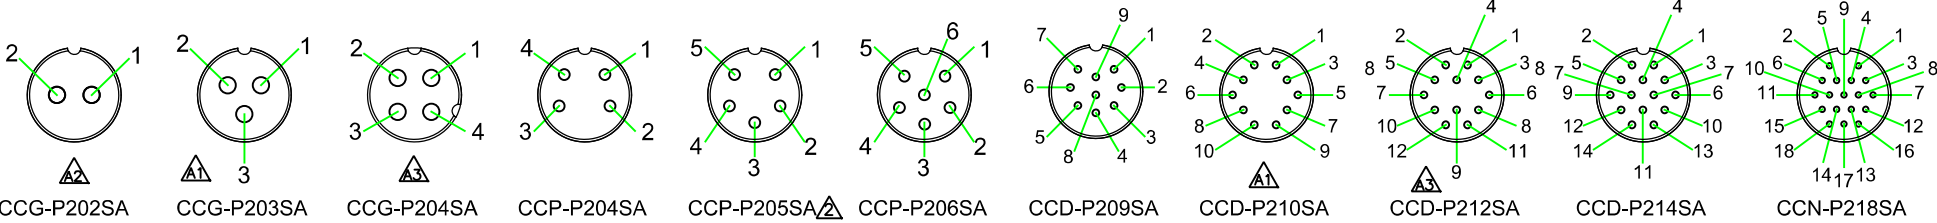

PIN ASSIGNMENT FRONT VIEW (前視圖)

9	CLAMP NUT	NYLON	BLACK	1	
8	TUBE	RUBBER. (Suitable for cable OD= 3~5 & 5 ~ 8mm.)	BLACK	2	
7	HOOD	NYLON	BLACK	1	
6	GASKET	RUBBER.	BLACK	1	
5	O-RING	NBR.	BLACK	1	O-1212-NK01
4	SCREW NUT	NYLON+GF.	BLACK	1	
3	CONTACT	BRASS, FEMALE CONTACT. 6 u" GOLD PLATED.		N	
2	CONNECTOR	C SIZE FEMALE ONNECTOR INSERT.NYLON+GF.	BLACK	1	
1	O-RING	NBR	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE	Circular C Size Female Solder Pin Screw type Field Installable Plug
SCALE	1:1	P/N:	CCx-P2xxSA
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX, ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°	REV.	SHEET	DWG.NO: CCx-P2xxSA
B	1/1	DR.	SIBYL
		CH.	JAMES
		AP.	