


RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Apr/30/2009
A1	Change screw nut shape.	Nov/20/2013
NOTE1	Remove CCx-P4xxSN & add CCG 4P.	Apr/19/2024

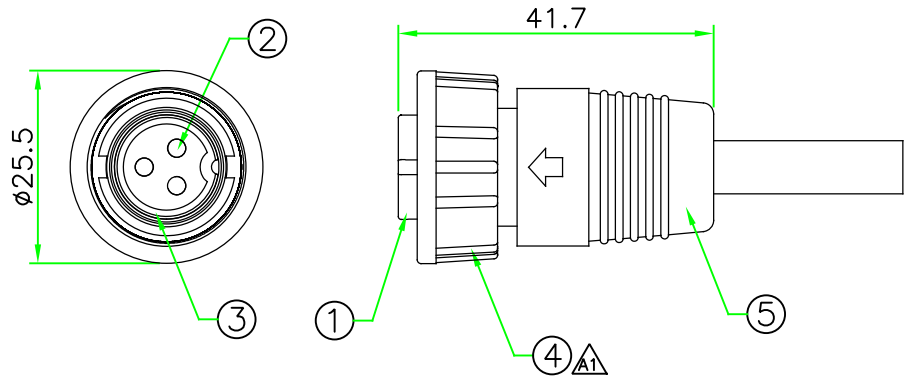


NOTES:

1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 2A / 5A / 10A / 20A
CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. HOW TO ORDER: CCx-P2xxSN

02 - 2 PIN 09 - 9 PIN
03 - 3 PIN 10 - 10 PIN
04 - 4 PIN 12 - 12 PIN
05 - 5 PIN 14 - 14 PIN
06 - 6 PIN 18 - 18 PIN
G - CURRENT RATING 20A
P - CURRENT RATING 10A
D - CURRENT RATING 5A
N - CURRENT RATING 2A

※Cable specification and length can be customized.

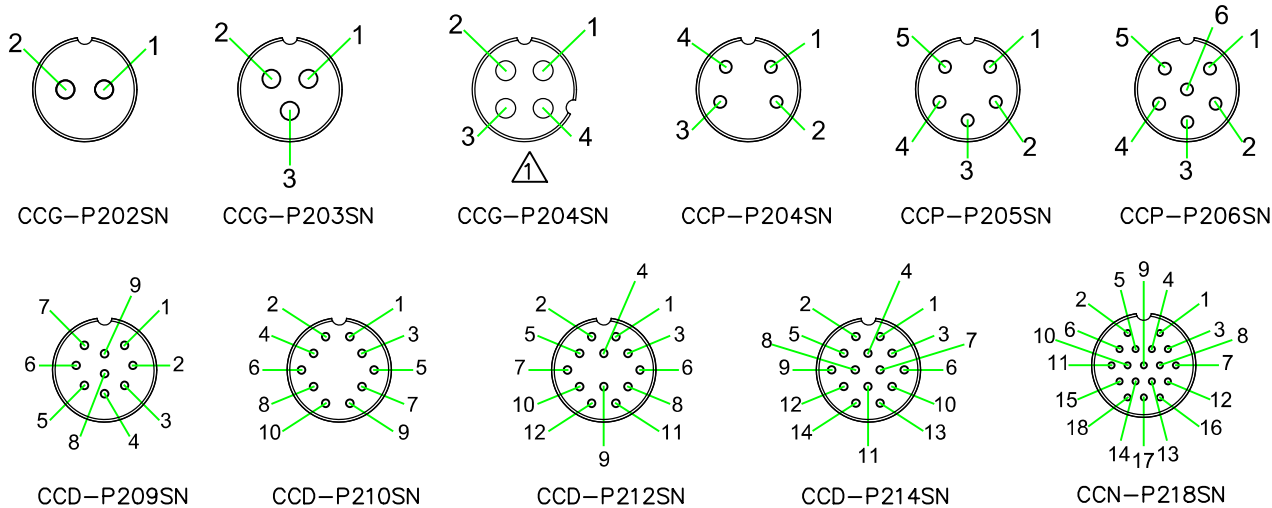

PIN ASSIGNMENT FRONT VIEW(前視圖)

5	OVERMOLD	PVC or PU.	BLACK	1	
4	SCREW NUT	Nylon+GF.	BLACK	1	
3	O-RING	Silicon.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold Plated. Female Contact.		N	
1	CONNECTOR	C Size Female Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE :	Circular C Size Female Screw Type Molded Cable
SCALE	1:1	P/N:	CCx-P2xxSN
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX, ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ± 1°	REV.	DWG.NO:	CCx-P2xxSN
A1	SHEET 1/1		DR. SIBYL CH. JAMES AP.