
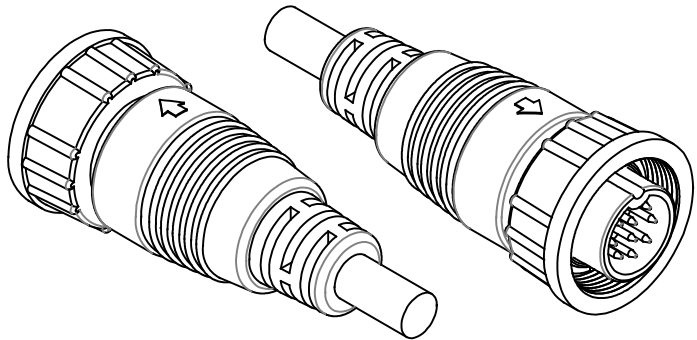
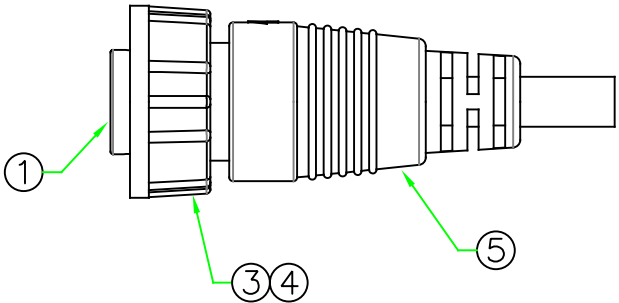



RoHS


REV.	DESCRIPTION	DATE
A	ISSUE	Mar/24/2024

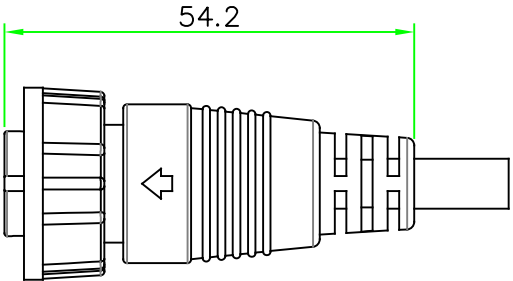

- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 5A / 10A / 20A
CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - HOW TO ORDER: CCx-P4xxSM

03 - 3 PIN
05 - 5 PIN
09 - 9 PIN

G - CURRENT RATING 20A
P - CURRENT RATING 10A
D - CURRENT RATING 5A

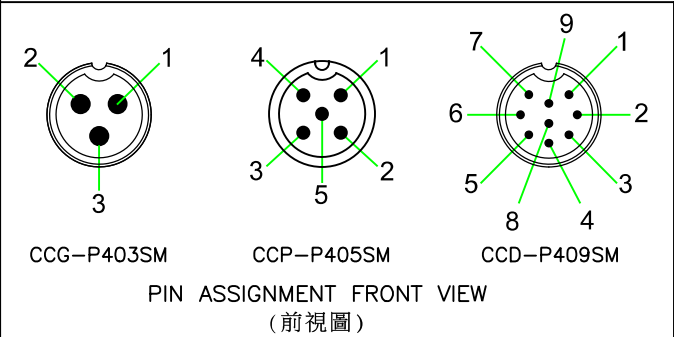

※Cable specification and length can be customized.

5	OVERMOLD	PVC or PU.	BLACK	1	
4	SCREW NUT	Nylon+GF.	BLACK	1	
3	O-RING	Silicon.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold Plated .Male Contact.		N	
1	CONNECTOR	C Size Female Connector Insert.NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
		UNIT: mm	TITLE : Circular C Size Screw Type Female Connector Male Pin Molded Cable		
SCALE		1:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX, ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ± 1°			P/N: CCx-P4xxSM	DR. SIBYL	
				CH. JAMES	
			REV. A	SHEET 1/1	DWG.NO: CCx-P4xxSM