



RoHS 機密

| REV. | DESCRIPTION         | DATE        |
|------|---------------------|-------------|
| A    | ISSUE (DI-11301065) | Feb/15/2024 |
|      |                     |             |
|      |                     |             |

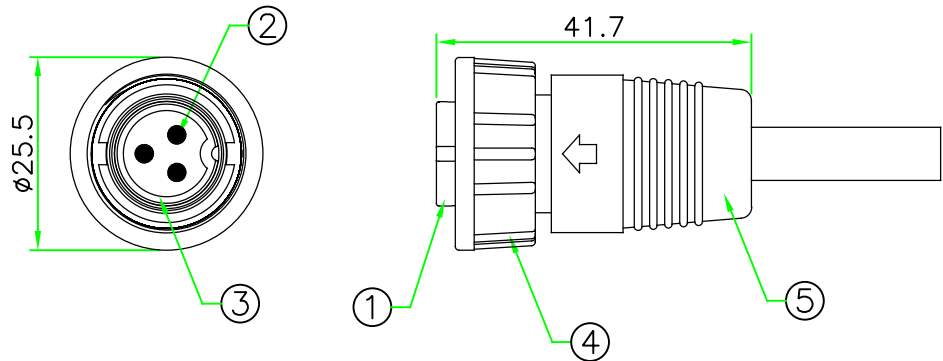

- NOTES:
1. ELECTRICAL CHARACTERISTICS:  
CURRENT RATING: 5A / 10A / 20A  
CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C  
DIELECTRIC WITHSTANDING VOLTAGE:  
500V AC FOR ONE MINUTE
2. HOW TO ORDER: CCx-P4xxSN
- 03 - 3 PIN
  - 05 - 5 PIN
  - 09 - 9 PIN
- G - CURRENT RATING 20A  
P - CURRENT RATING 10A  
D - CURRENT RATING 5A

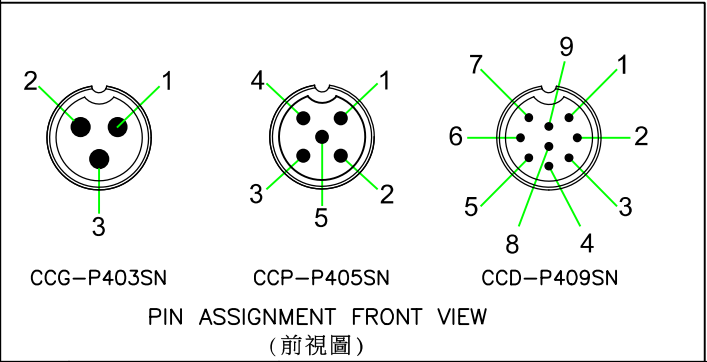

※ Cable specification and length can be customized.

|     |           |                                          |       |      |         |
|-----|-----------|------------------------------------------|-------|------|---------|
| 5   | OVERMOLD  | PVC or PU.                               | BLACK | 1    |         |
| 4   | SCREW NUT | Nylon+GF.                                | BLACK | 1    |         |
| 3   | O-RING    | Silicon.                                 | BLACK | 1    |         |
| 2   | CONTACT   | Brass , 6 u" Gold Plated. Male Contact.  |       | N    |         |
| 1   | CONNECTOR | C Size Female Connector Insert.NYLON+GF. | BLACK | 1    |         |
| No. | PART NAME | DESCRIPTION                              | COLOR | Q'TY | REMARKS |

| HOLIN® HTP ASIA TECHNOLOGY CO., LTD.                                                  |          |                                                                                 |  |           |  |
|---------------------------------------------------------------------------------------|----------|---------------------------------------------------------------------------------|--|-----------|--|
| 禾凌科技股份有限公司                                                                            |          |                                                                                 |  |           |  |
|  | UNIT: mm | TITLE : Circular C Size Screw Type<br>Female Connector Male Pin<br>Molded Cable |  |           |  |
| SCALE                                                                                 | 1:1      |                                                                                 |  |           |  |
| UNLESS OTHERWISE SPECIFIED TOLERANCES:                                                |          | P/N: CCx-P4xxSN                                                                 |  | DR. SIBYL |  |
| .XX, ±1.0                                                                             |          |                                                                                 |  | CH. JAMES |  |
| .X ±1.0 .XX ±0.5                                                                      |          |                                                                                 |  |           |  |
| .XXX ±0.25 ANGLE ± 1°                                                                 |          |                                                                                 |  |           |  |
| REV.                                                                                  | SHEET    | DWG.NO: CCx-P4xxSN                                                              |  | AP.       |  |
| A                                                                                     | 1/1      |                                                                                 |  |           |  |