

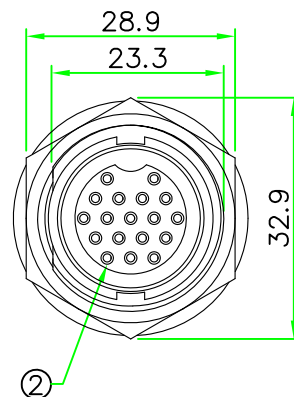
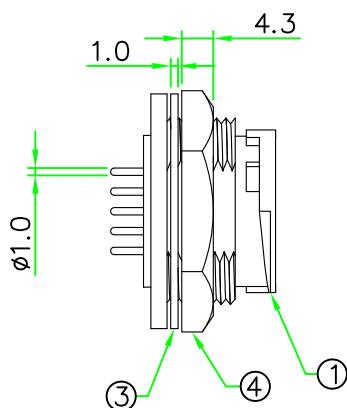


RECOMMENDED
PANEL CUT OUT

RoHS
IP66~68

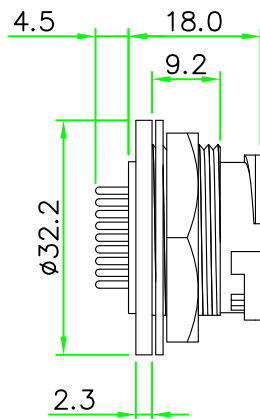


REV.	DESCRIPTION	DATE
A	ISSUE	Oct/14/2014

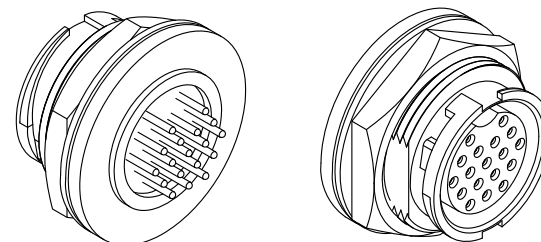


NOTES:

- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 5A
CONNECTOR TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
- PANEL THICKNESS MAX. 3.5 mm



PIN ASSIGNMENT
FRONT VIEW
(前視圖)



PCB LAYOUT

4	HEX NUT	Nylon + GF.	BLACK	1	
3	GASKET	EPDM.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold Plated . Female Contact.		18	
1	CONNECTOR	D Size Male Connector Insert.NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
		UNIT: mm	TITLE : Circular D Size 18P Male Connector Female Pin Rear Mount Lock Type Round Flange PCB Pin		
SCALE		1:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.25 .XX ± 0.1 .XXX± 0.05 ANGLE ± 1°			P/N: CDD-L318CPR		DR. Patty
REV. A SHEET 1/1					CH. ERIC
			DWG.NO: CDD-L318CPR		AP.