


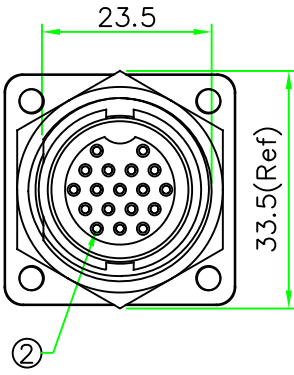
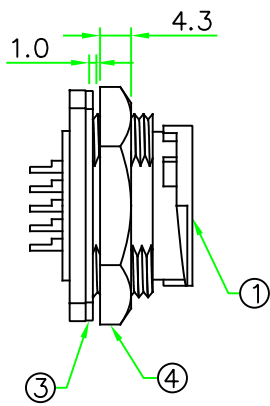





RECOMMENDED
PANEL CUT OUT


RoHS

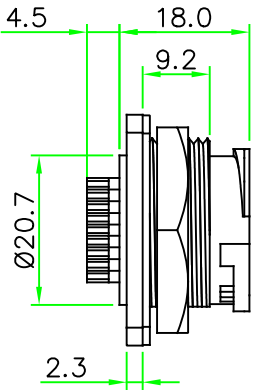

REV.	DESCRIPTION	DATE
A	ISSUE	Oct/26/2024

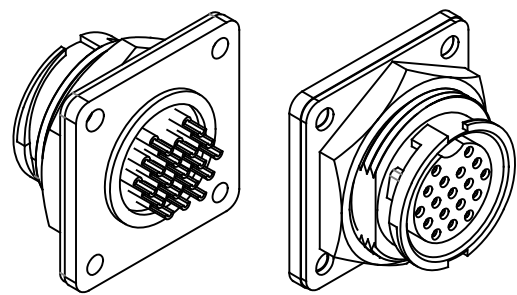

- NOTES:
- 1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 5A
CONNECTOR TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - 2. PANEL THICKNESS MAX. 3.5 mm



PIN ASSIGNMENT
FRONT VIEW
(前視圖)

4	HEX NUT	Nylon + GF.	BLACK	1	
3	GASKET	EPDM.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold Plated . Female Contact.		18	
1	CONNECTOR	D Size Male Connector Insert.NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
	UNIT: mm	TITLE Circular D Size 18P Male Connector Female Pin Rear Mount Lock Type Square Flange Solder Bucket Pin			
SCALE	1:1	P/N: CDD-L318QSR		DR. JAMES	
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX, ± 0.5 .X ± 0.5 ,XX ± 0.25 .XXX± 0.1 ANGLE ± 1°		DWG.NO: CDD-L318QSR		CH. ERIC	
REV. A	SHEET 1/1			AP.	