


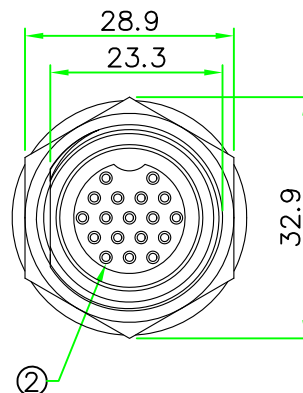
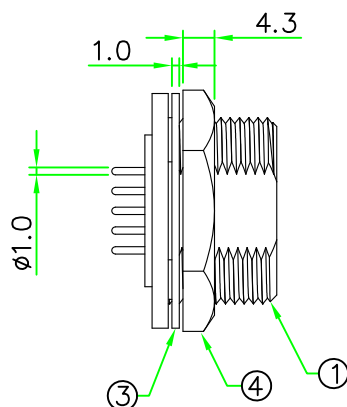


RECOMMENDED
PANEL CUT OUT

RoHS
IP66~68

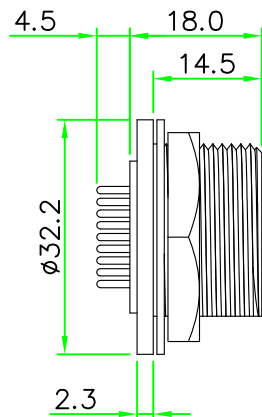


PIN ASSIGNMENT
FRONT VIEW
(前視圖)



PCB LAYOUT

REV.	DESCRIPTION	DATE
A	ISSUE	Oct/14/2014

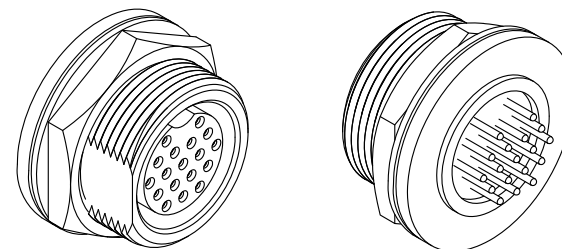

NOTES:

- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 5A
CONNECTOR TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
- PANEL THICKNESS MAX. 5.0 mm

HOLIN [®] HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
UNIT: mm		TITLE : Circular D Size 18P Male Connector Female Pin Rear Mount Screw Type Round Flange PCB Pin			
SCALE		1:1		P/N: CDD-P318CPR	
UNLESS OTHERWISE SPECIFIED TOLERANCES:		.X ± 0.25 .XX ± 0.1 .XXX ± 0.05 ANGLE ± 1°		DR. Patty	
REV. A		SHEET 1/1		CH. ERIC	
DWG.NO: CDD-P318CPR				AP.	

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
4	HEX NUT	Nylon + GF.	BLACK	1	
3	GASKET	EPDM.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold Plated . Female Contact.		18	
1	CONNECTOR	D Size Male Connector Insert.NYLON+GF.	BLACK	1	