
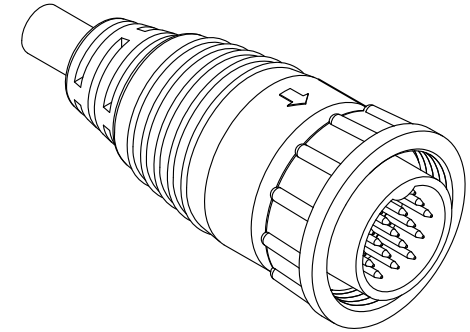


RoHS

IP66~68

| REV. | DESCRIPTION | DATE        |
|------|-------------|-------------|
| A    | ISSUE       | Sep/29/2014 |
|      |             |             |
|      |             |             |

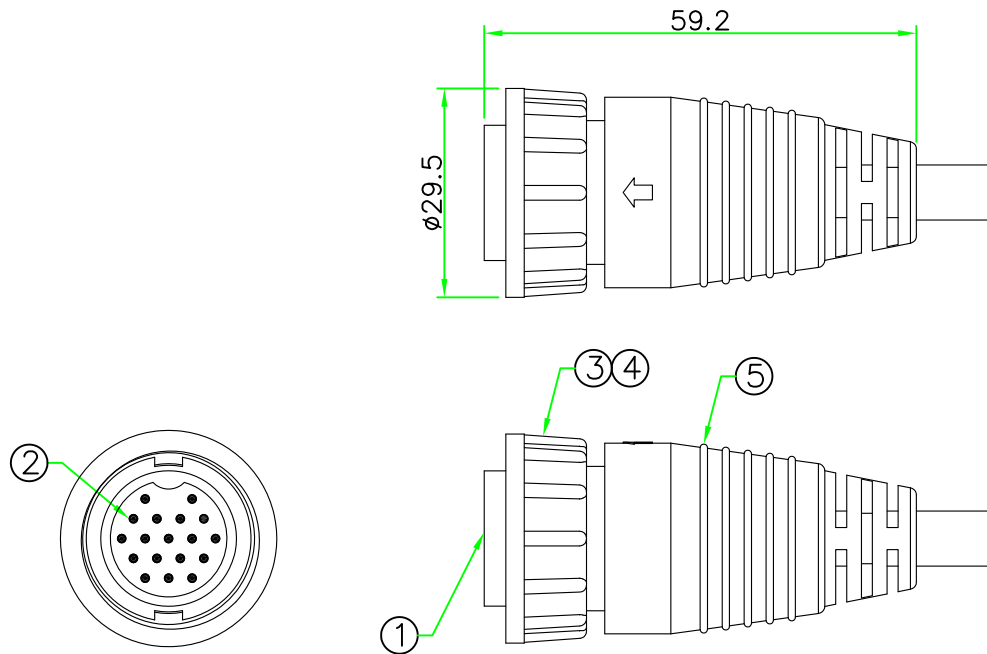

## NOTES:


## 1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 5A

CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

Pin Assignment  
Front View  
(前視圖)

| 5   | OVERMOLD  | PVC or PU.                                | BLACK | 1    |         |
|-----|-----------|-------------------------------------------|-------|------|---------|
| 4   | Screw NUT | NYLON+GF.                                 | BLACK | 1    |         |
| 3   | O-RING    | EPDM.                                     | BLACK | 1    |         |
| 2   | CONTACT   | Brass , 6u" Gold Plated. Male Contact.    |       | 18   |         |
| 1   | CONNECTOR | D Size Female Connector Insert, NYLON+GF. | BLACK | 1    |         |
| No. | PART NAME | DESCRIPTION                               | COLOR | Q'TY | REMARKS |

| HOLIN <sup>®</sup> HTP ASIA TECHNOLOGY CO., LTD.<br>禾凌科技股份有限公司 |   |          |                                                                                       |  |           |
|----------------------------------------------------------------|---|----------|---------------------------------------------------------------------------------------|--|-----------|
|                                                                |   | UNIT: mm | TITLE : Circular D Size Screw Type<br>18Pin Female Connector Male Pin<br>Molded Cable |  |           |
| SCALE                                                          |   | 1:1      | P/N: CDD-P418SM                                                                       |  | DR. Patty |
| UNLESS OTHERWISE SPECIFIED TOLERANCES:                         |   |          | DWG.NO: CDD-P418SM                                                                    |  | CH. ERIC  |
| .X ± 0.25 .XX ± 0.1<br>.XXX ± 0.05 ANGLE ± 1°                  |   |          |                                                                                       |  | AP.       |
| REV.                                                           | A | SHEET    | 1/1                                                                                   |  |           |