
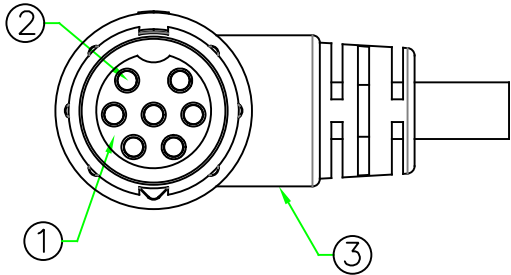
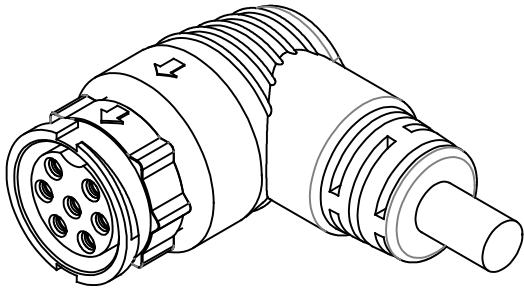



RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Aug/15/2024

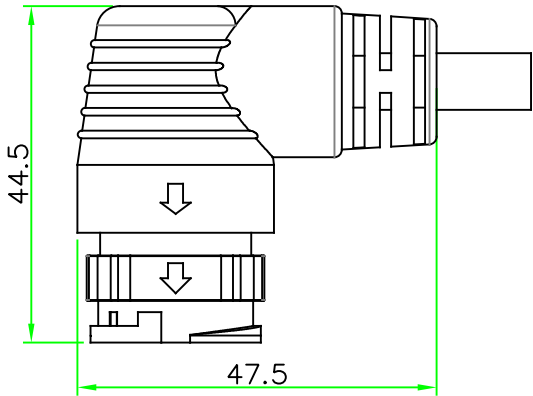


- NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 20A
CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. HOW TO ORDER: CDG-L3xxRM
- 2 - 2 PINS 5 - 5 PINS
3 - 3 PINS 6 - 6 PINS
4 - 4 PINS 7 - 7 PINS


※ Cable specification and length can be customized.




CDG-L302RM




CDG-L303RM




CDG-L304RM



CDG-L305RM



CDG-L306RM



CDG-L307RM

Pin Assignment Front View (前視圖)

3	OVERMOLD	PVC or PU.	BLACK	1	
2	CONTACT	Brass, Female Pin. 6u" Gold Plated.		N	
1	CONNECTOR	D Size Male Connector Insert, Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
	UNIT: mm	TITLE : Circular D Size Lock Type Male Connector Female Pin R/A Molded Cable			
SCALE	1:1				
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX, ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ± 1°		P/N: CDG-L3xxRM		DR.	SIBYL
REV. A		SHEET 1/1		CH.	JAMES
		DWG.NO: CDG-L3xxRM		AP.	