



RoHS

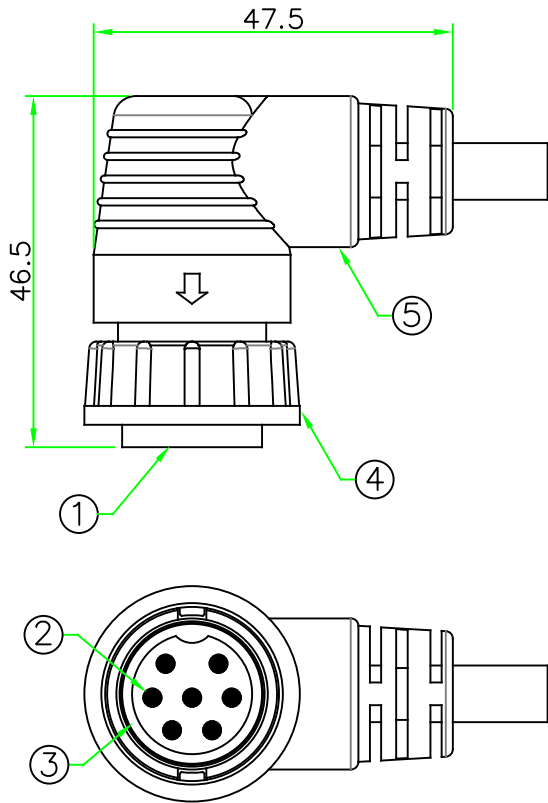


REV.	DESCRIPTION	DATE
A	ISSUE	Aug/15/2024

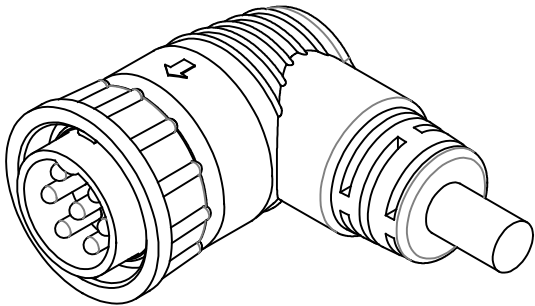


- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 20A
CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - HOW TO ORDER: CDG-L4xxRM
2 - 2 PINS 5 - 5 PINS
3 - 3 PINS 6 - 6 PINS
4 - 4 PINS 7 - 7 PINS


※ Cable specification and length can be customized.




CDG-L402RM



CDG-L403RM



CDG-L404RM



CDG-L405RM



CDG-L406RM



CDG-L407RM

Pin Assignment Front View (前視圖)

5	OVERMOLD	PVC or PU.	BLACK	1	
4	LOCK NUT	Nylon+GF.	BLACK	1	
3	O-RING	EPDM.	BLACK	1	
2	CONTACT	Brass, Male Pin. 6u" Gold Plated.		N	
1	CONNECTOR	D Size Female Connector Insert, Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
		UNIT: mm	TITLE : Circular D Size Lock Type Female Connector Male Pin R/A Molded Cable		
SCALE		1:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N:		DR. SIBYL	
XX, ±1.0		CDG-L4xxRM		CH. JAMES	
.X ±1.0 .XX ±0.5					
.XXX ±0.25 ANGLE ± 1°					
REV.		SHEET		AP.	
A		1/1		DWG.NO: CDG-L4xxRM	