



RoHS

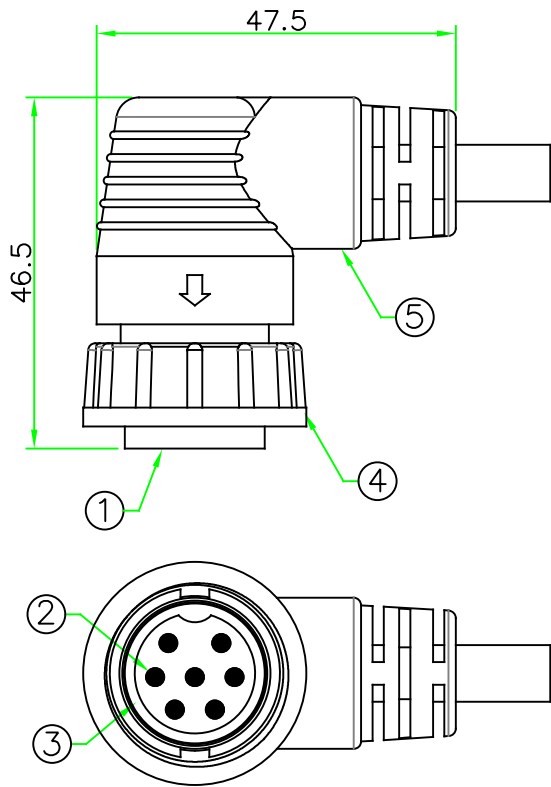


REV.	DESCRIPTION	DATE
A	ISSUE	Aug/15/2024

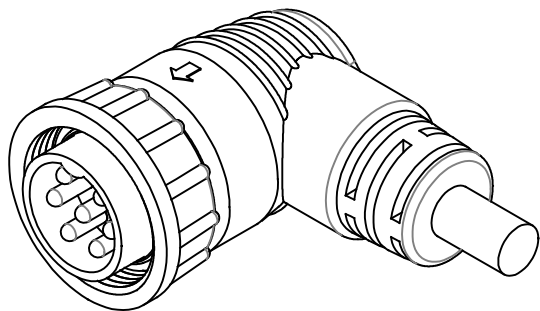

- NOTES:
- 1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 20A
CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - 2. HOW TO ORDER: CDG-P4xxRM
 - 2 - 2 PINS 5 - 5 PINS
 - 3 - 3 PINS 6 - 6 PINS
 - 4 - 4 PINS 7 - 7 PINS

※ Cable specification and length can be customized.

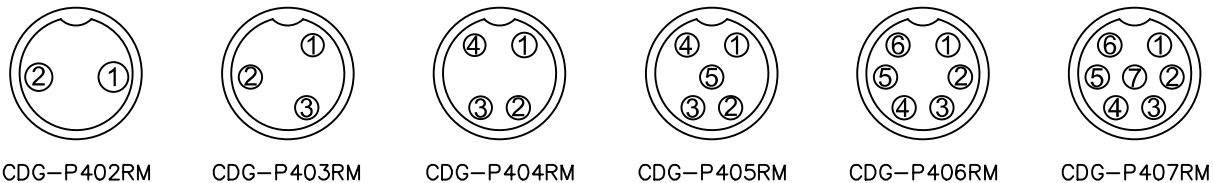

Pin Assignment Front View (前視圖)

5	OVERMOLD	PVC or PU.	BLACK	1	
4	SCREW NUT	Nylon+GF.	BLACK	1	
3	O-RING	EPDM.	BLACK	1	
2	CONTACT	Brass, Male Pin. 6u" Gold Plated.		N	
1	CONNECTOR	D Size Female Connector Insert, Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司			
	UNIT: mm	TITLE : Circular D Size Screw Type Female Connector Male Pin R/A Molded Cable	
SCALE	1:1		
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX, ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ± 1°		P/N: CDG-P4xxRM	DR. SIBYL
			CH. JAMES
		REV. A	SHEET 1/1