
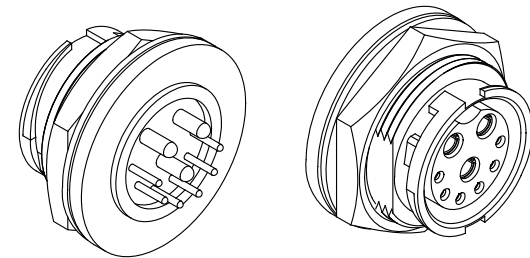
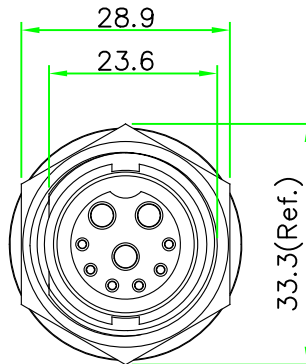
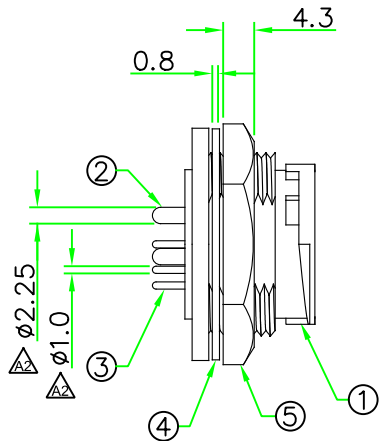



RECOMMENDED
PANEL CUT OUT

RoHS

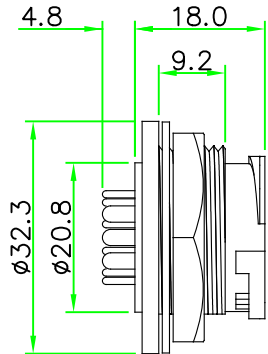

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 20A + 5A

CONNECTOR TEMPERATURE RANGE: -25°C TO +85°C


DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE


2. Panel Thickness Max. : 3.5mm

3. HOW TO ORDER: CDGD-L3xxCPR


- 2 - 2 PINS 5 - 5 PINS
3 - 3 PINS 6 - 6 PINS
4 - 4 PINS 7 - 7 PINS
2 - 2 PINS
3 - 3 PINS




CDGD-L332CPR




CDGD-L333CPR




CDGD-L334CPR



CDGD-L335CPR



CDGD-L336CPR



CDGD-L337CPR

PIN ASSIGNMENT FRONT VIEW (前視圖)

5	HEX NUT	Nylon + GF.	BLACK	1	
4	GASKET	EPDM.	BLACK	1	
3	CONTACT	BRASS , 6u" Gold Plated . Female Contact. (5A)		N	
2	CONTACT	BRASS , 6u" Gold Plated . Female Contact. (20A)		N	
1	CONNECTOR	D Size Male Connector Insert.NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
		UNIT: mm	TITLE Circular D Size Male Connector Female Pin Rear Mount Lock Type Circular Flange PCB Mount Pin		
	SCALE 1:1	P/N: CDGD-L3xxCPR		DR. JAMES	CH. ERIC
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX. ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°		REV. B1	SHEET 1/2	DWG.NO: CDGD-L3xxCPR	AP.