



RoHS

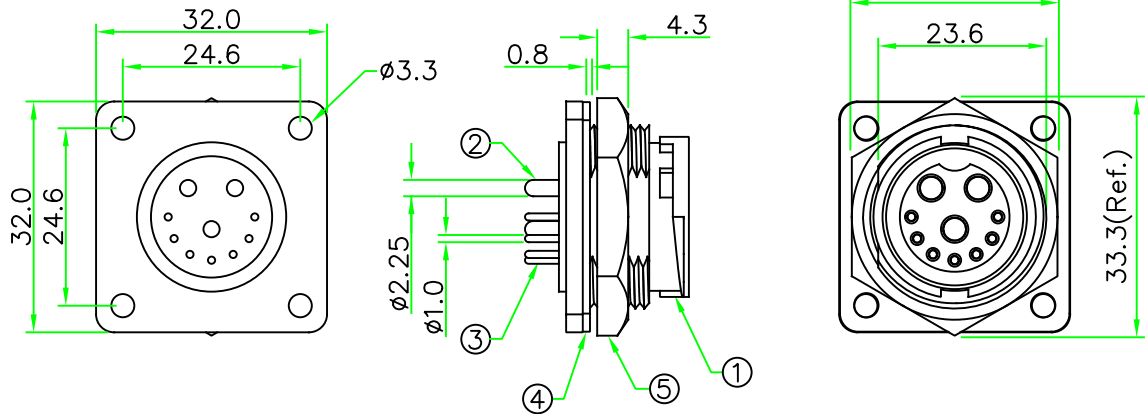


REV.	DESCRIPTION	DATE
A	ISSUE	Oct/27/2024

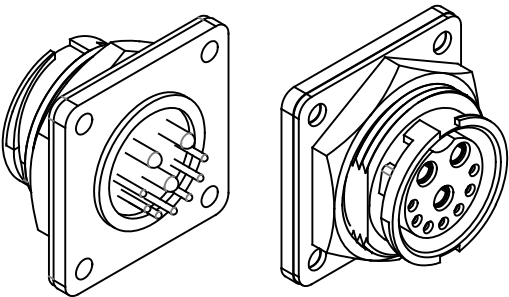

- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 20A + 5A
CONNECTOR TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - Panel Thickness Max. : 3.5mm
 - HOW TO ORDER: CDGD-L3xxQPR

- 2 - 2 PINS 5 - 5 PINS
3 - 3 PINS 6 - 6 PINS
4 - 4 PINS 7 - 7 PINS
2 - 2 PINS
3 - 3 PINS

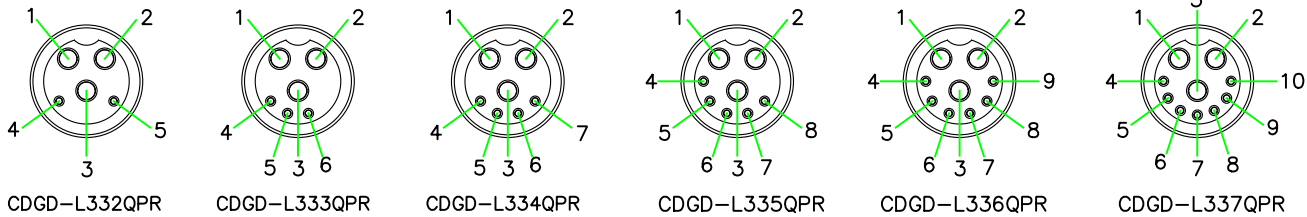

PIN ASSIGNMENT FRONT VIEW (前視圖)

5	HEX NUT	Nylon + GF.	BLACK	1	
4	GASKET	EPDM.	BLACK	1	
3	CONTACT	BRASS , 6u" Gold Plated . Female Contact. (5A)		N	
2	CONTACT	BRASS , 6u" Gold Plated . Female Contact. (20A)		N	
1	CONNECTOR	D Size Male Connector Insert.NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
UNIT: mm		TITLE Circular D Size Male Connector Female Pin Rear Mount Lock Type Square Flange PCB Mount Pin			
SCALE 1:1		P/N: CDGD-L3xxQPR		DR. JAMES	
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX, ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°		CH. ERIC			
REV. A		SHEET 1/1		DWG.NO: CDGD-L3xxQPR	
				AP.	