

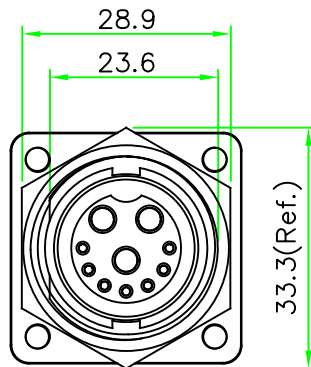
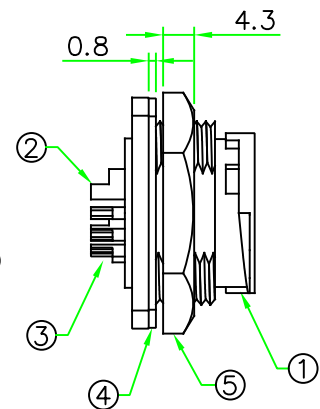



RoHS

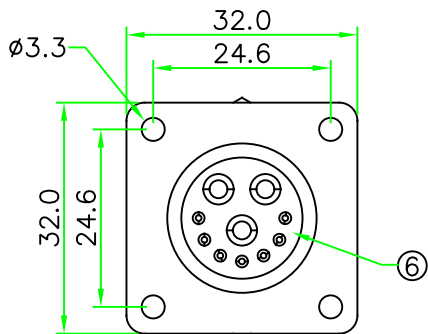

REV.	DESCRIPTION	DATE
A	ISSUE	Oct/27/2024

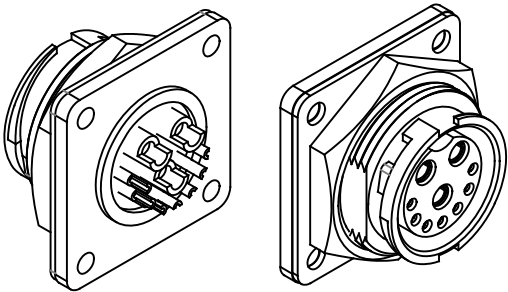

- NOTES:
- 1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 20A + 5A
CONNECTOR TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - 2. PANEL THICKNESS MAX. 3.5 mm
 - 3. HOW TO ORDER: CDGD-L3xxQSR
- 2 - 2 PINS 5 - 5 PINS
3 - 3 PINS 6 - 6 PINS
4 - 4 PINS 7 - 7 PINS
2 - 2 PINS
3 - 3 PINS

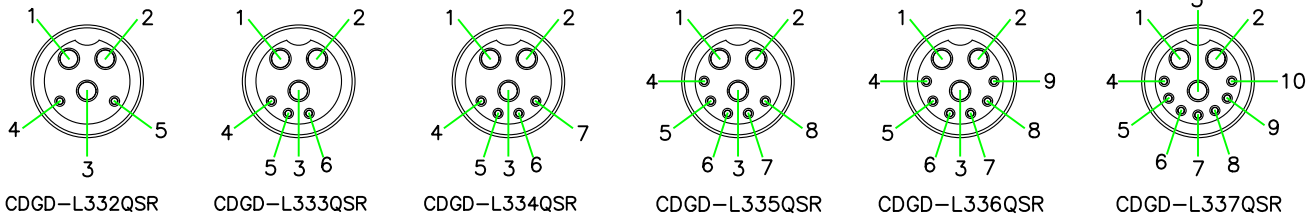

PIN ASSIGNMENT FRONT VIEW (前視圖)

6	GLUE	EPOXY.	BLACK		
5	HEX NUT	NYLON+GF.	BLACK	1	
4	GASKET	EPDM.	BLACK	1	
3	CONTACT	BRASS, Female Pin. 6u" Gold Plated.(5A)		N	
2	CONTACT	BRASS, Female Pin. 6u" Gold Plated.(20A)		N	
1	CONNECTOR	D Size Male Connector Insert. NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
		UNIT: mm	TITLE Circular D Size Male Connector Female Pin Rear Mount Lock Type Square Flange Solder Bucket Pin		
		SCALE 1:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES: xx, ± 0.5 .x ± 0.5 ,xx ± 0.25 .xxx± 0.1 ANGLE ± 1°		P/N: CDGD-L3xxQSR		DR. JAMES	
REV. A		SHEET 1/1		CH. ERIC	
		DWG.NO: CDGD-L3xxQSR		AP.	