

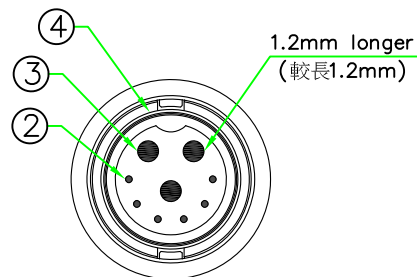


RoHS
IP66~68

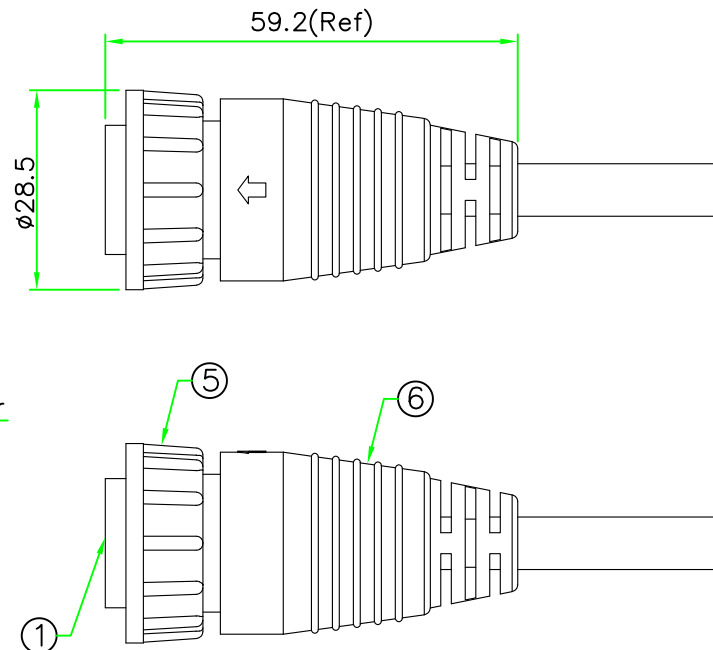


REV.	DESCRIPTION	DATE
A	ISSUE	Jul/24/2014
A1	Cancel P/N NO. CDGD-L333CPR-B & Change CDGD-L333CPR PIN ASSIGNMENT	Aug/01/2014
B	Modified pin assignment, title & Draw No.	Oct/15/2020

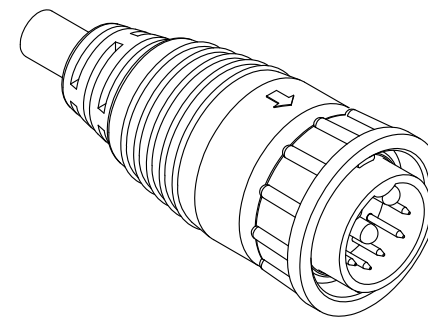

NOTES:

- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 20A + 5A
CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
- HOW TO ORDER: CDGD-L4xxSM

- 2 - 2 PIN
- 3 - 3 PIN
- 4 - 4 PIN
- 5 - 5 PIN
- 6 - 6 PIN
- 7 - 7 PIN
- 2 - 2 PIN
- 3 - 3 PIN

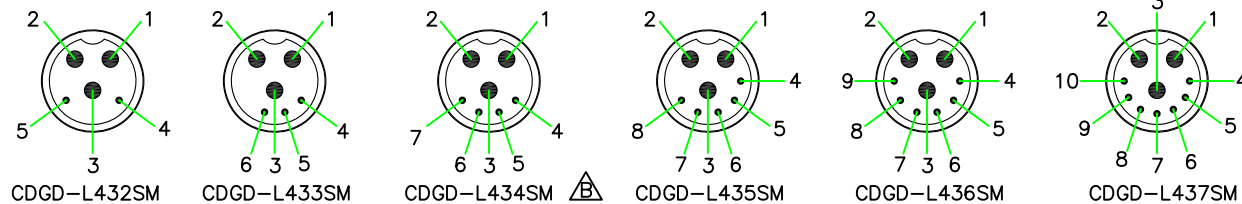

Pin Assignment Front View
(前視圖)

6	OVERMOLD	PVC or PU.	BLACK	1	
5	LOCK NUT	NYLON+GF.	BLACK	1	
4	O-RING	EPDM.	BLACK	1	
3	CONTACT	BRASS ,Male Pin. 6u" Gold Plated.		N	
2	CONTACT	BRASS ,Male Pin. 6u" Gold Plated.		N	
1	CONNECTOR	D Size Female Connector Insert, NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司		UNIT: mm		TITLE : Circular D Size Lock Type Female Connector Male Pin Molded Cable	
SCALE 1:1		P/N: CDGD-L4xxSM		DR. SIBYL	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°		DWG.NO: CDGD-L4xxSM		CH. JAMES	
REV. B		SHEET 1/1		AP.	