



RoHS
IP66~68

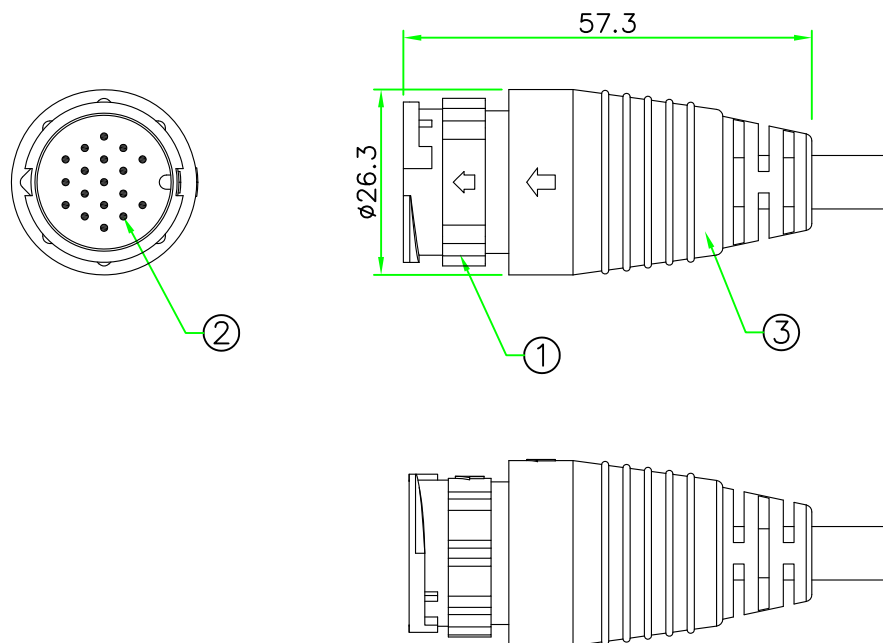

REV.	DESCRIPTION	DATE
A	ISSUE	Jun/25/2015

Ref.

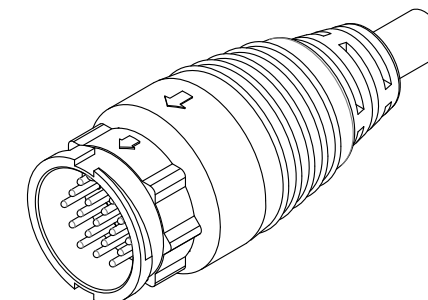

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 5A / 20A

CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: CDx-L1xxSM

02 - 2 PIN 18 - 18 PIN

03 - 3 PIN

04 - 4 PIN


05 - 5 PIN

06 - 6 PIN


07 - 7 PIN

G - CURRENT RATING 20A


D - CURRENT RATING 5A




CDG-L102SM




CDG-L103SM




CDG-L104SM




CDG-L105SM



CDG-L106SM



CDG-L107SM



CDD-L118SM

PIN ASSIGNMENT FRONT VIEW (前視圖)

3	OVERMOLD	PVC or PU.	BLACK	1	
2	CONTACT	BRASS , 6 u" Gold Plated .Male Contact.		N	
1	CONNECTOR	D Size Male Connector Insert.NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE :	Circular D Size Lock Type Male Connector Male Pin Molded Cable
SCALE	1:1		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°		P/N:	CDx-L1xxSM
REV.	SHEET	DWG.NO:	CDx-L1xxSM
A	1/1		
		DR.	Patty
		CH.	ERIC
		AP.	