
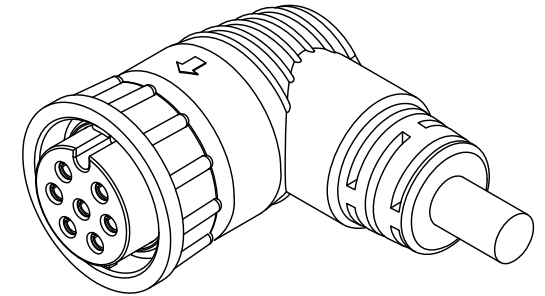


RoHS

IP66~68

REV.	DESCRIPTION	DATE
A	ISSUE	Mar/30/2015

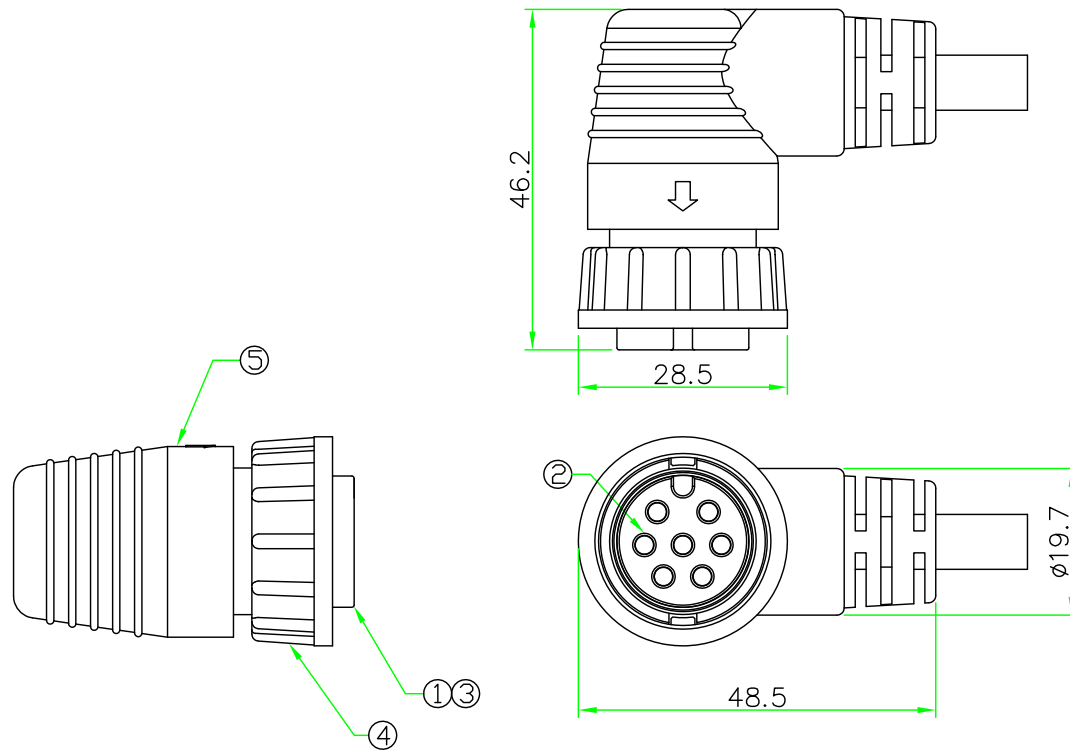

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 5A / 20A

CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: CDx-L2xxRM

02 - 2 PIN 18 - 18 PIN

03 - 3 PIN

04 - 4 PIN


05 - 5 PIN

06 - 6 PIN

07 - 7 PIN

G - CURRENT RATING 20A

D - CURRENT RATING 5A

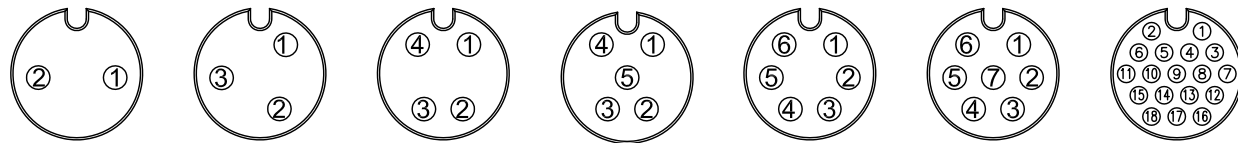

CDG-L202RM

CDG-L203RM

CDG-L204RM

CDG-L205RM

CDG-L206RM

CDG-L207RM

CDD-L218RM

PIN ASSIGNMENT FRONT VIEW
(前視圖)

5	OVERMOLD	PVC or PU.	BLACK	1			UNIT: mm	TITLE : Circular D Size Lock Type Female Connector Female Pin Right Angle Molded Cable	P/N: CDx-L2xxRM	DR. Patty CH. ERIC AP.
4	LOCK NUT	NYLON+GF.	BLACK	1						
3	O-RING	EPDM	BLACK	1						
2	CONTACT	Brass ,Female Pin. 6u" Gold Plated.		N						
1	CONNECTOR	D Size Female Connector Insert, NYLON+GF.	BLACK	1						
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	REV. A	SHEET 1/1	DWG.NO: CDx-L2xxRM		

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

UNLESS OTHERWISE SPECIFIED TOLERANCES:	SCALE 1:1	P/N: CDx-L2xxRM	DR. Patty CH. ERIC AP.
.X ± 0.5	.XX ± 0.25		
.XXX ± 0.1	ANGLE ± 1°		
REV. A	SHEET 1/1		