

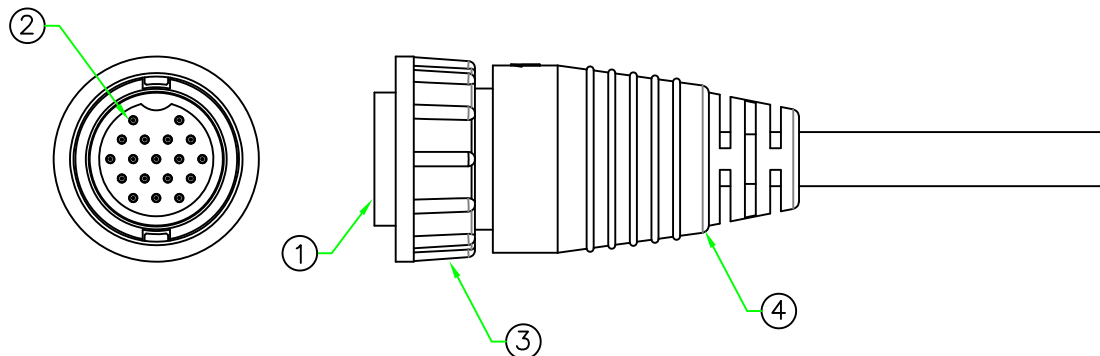


RoHS

IP66

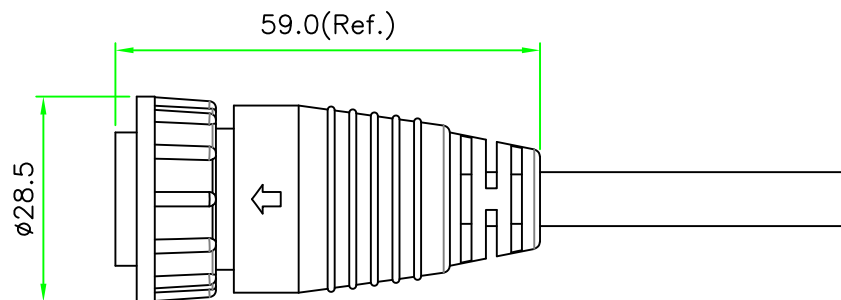

*Cable specification and length can be customized.

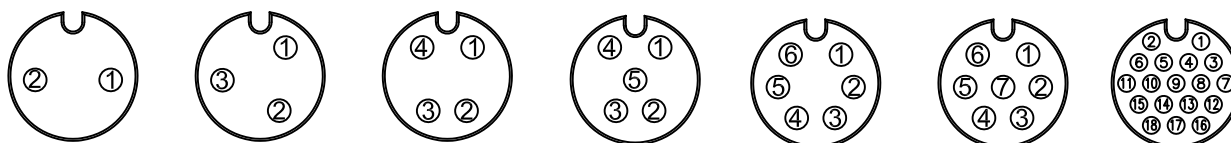


CDG-L402SM CDG-L402SM CDG-L402SM CDG-L402SM CDG-L402SM CDG-L402SM CDD-L418SM

PIN ASSIGNMENT FRONT VIEW (前視圖)

4	OVERMOLD	PVC or PU.	BLACK	1	
3	LOCK NUT	Nylon+GF.	BLACK	1	
2	CONTACT	Brass, 6 u" Gold Plated. Female Contact.		N	
1	CONNECTOR	D Size Female Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

REV	DESCRIPTION	DATE
A	ISSUE	Nov/15/2019

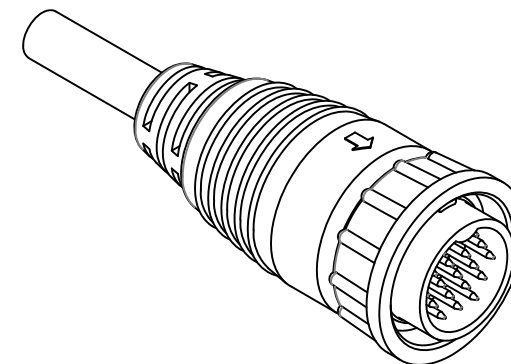

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 5A / 20A

CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: CDx-L4xxSM

02 - 2 PIN 06 - 6 PIN

03 - 3 PIN 07 - 7 PIN

04 - 4 PIN 18 - 18 PIN

05 - 5 PIN

G - CURRENT RATING 20A

D - CURRENT RATING 5A

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE : Circular D Size Lock Type Female Connector Female Pin Molded Cable	
SCALE	1:1		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°		P/N: CDx-L4xxSM	DR. SIBYL
			CH. JAMES
REV. A	SHEET 1/1	DWG.NO: CDx-L4xxSM	AP.