REV.	DESCRIPTION	DATE
A	ISSUE	Oct/29/2014



RECOMMENDED
PANEL CUT OUT

P/N	L
CDD	1.6
CDG	8.6

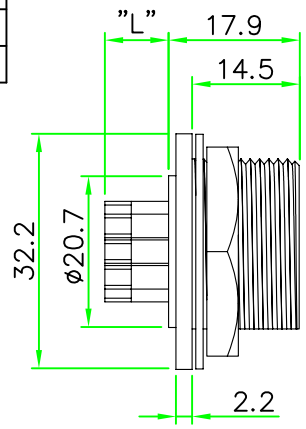

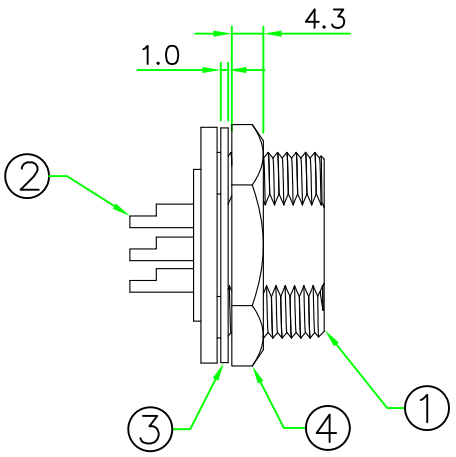

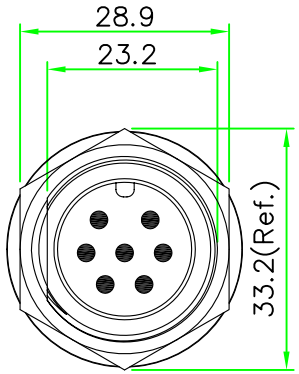





RoHS
IP66~68

NOTES:
1. ELECTRICAL CHARACTERISTICS:
   CURRENT RATING: 5A / 20A
   CONNECTOR TEMPERATURE RANGE: -25°C TO +85°C
   DIELECTRIC WITHSTANDING VOLTAGE:
   500V AC FOR ONE MINUTE
2. PANEL THICKNESS MAX. 5.0mm
3. HOW TO ORDER: CDx-P1xxCSR

   02 - 2 PIN 18 - 18 PIN
   03 - 3 PIN
   04 - 4 PIN
   05 - 5 PIN
   06 - 6 PIN
   07 - 7 PIN

   G - CURRENT RATING 20A
   D - CURRENT RATING 5A

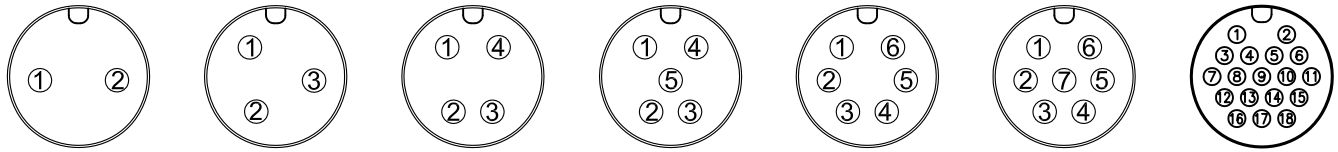

PIN ASSIGNMENT FRONT VIEW
(前視圖)

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
4	HEX NUT	Nylon + GF.	BLACK	1	
3	GASKET	EPDM.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold Plated . Male Contact.		N	
1	CONNECTOR	D Size Male Connector Insert.Nylon+GF.	BLACK	1	

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

UNIT: mm	TITLE : Circular D Size Male Connector Male Pin Rear Mount Screw Type Round Flange Solder Bucket Pin		
SCALE 1:1			
UNLESS OTHERWISE SPECIPED TOLERANCES: .x ± 0.25 .xx ± 0.1 .xxx± 0.05 ANGLE ± 1°	P/N: CDx-P1xxCSR	DR. Patty	
		CH. ERIC	
REV. A	DWG.NO: CDx-P1xxCSR	AP.	
SHEET 1/1			