






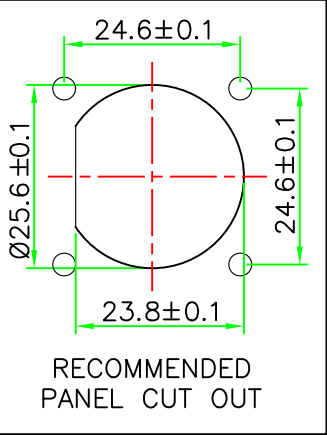


RECOMMENDED
PANEL CUT OUT

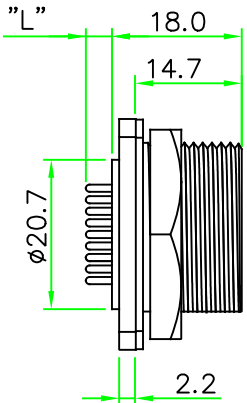


P/N No.	L
CDG	4.0
CDD	3.6

REV.	DESCRIPTION	DATE
A	ISSUE	Oct/23/2024

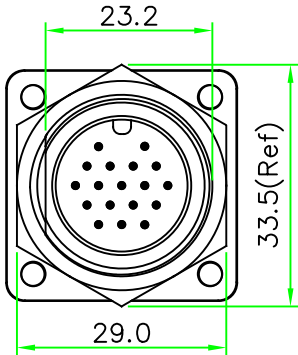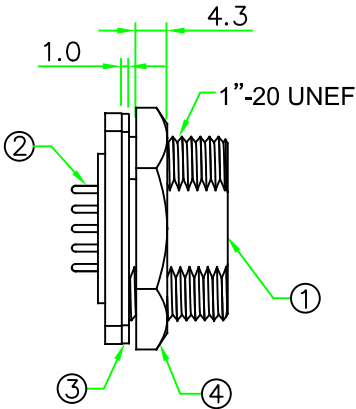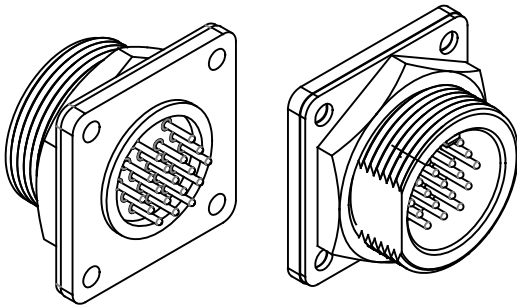


- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 5A / 20A
CONNECTOR TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - PANEL THICKNESS MAX. 3.0mm
 - HOW TO ORDER: CDx-P1xxQPR


- 02 - 2 PINS 18 - 18 PINS
03 - 3 PINS
04 - 4 PINS
05 - 5 PINS
06 - 6 PINS
07 - 7 PINS
G - CURRENT RATING 20A
D - CURRENT RATING 5A




CDG-P102QPR




CDG-P103QPR




CDG-P104QPR




CDG-P105QPR



CDG-P106QPR



CDG-P107QPR



CDD-P118QPR

PIN ASSIGNMENT FRONT VIEW
(前視圖)

4	HEX NUT	Nylon + GF.	BLACK	1	
3	GASKET	EPDM.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold Plated. Male Contact.		N	
1	CONNECTOR	D Size Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE: Circular D Size Male Connector Male Pin Rear Mount Screw Type Square Flange PCB Mount Pin
SCALE	1:1	
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX, ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°	P/N: CDx-P1xxQPR	DR. JAMES CH. ERIC
REV. A	SHEET 1/1	DWG.NO: CDx-P1xxQPR AP.