


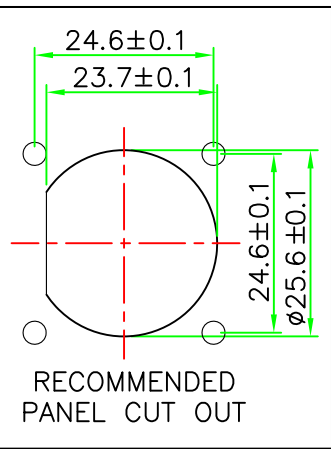
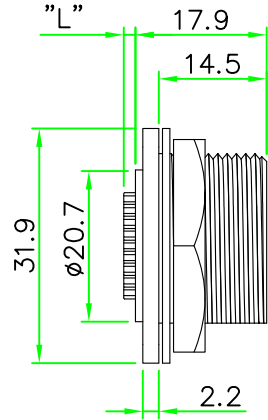


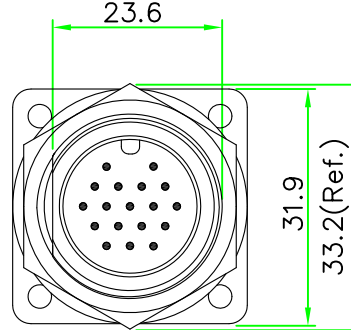

P/N	L
CDD	1.6
CDG	8.6

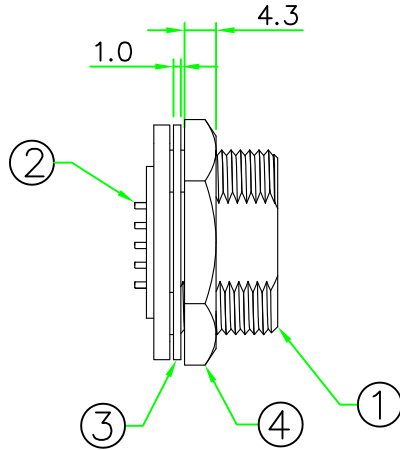

RoHS
IP66~68




NOTES:


- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 5A / 20A
CONNECTOR TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
- PANEL THICKNESS MAX. 5.0mm
- HOW TO ORDER: CDx-P1xxQSR

- 02 - 2 PIN 18 - 18 PIN
- 03 - 3 PIN
- 04 - 4 PIN
- 05 - 5 PIN
- 06 - 6 PIN
- 07 - 7 PIN


- G - CURRENT RATING 20A
- D - CURRENT RATING 5A




CDG-P102QSR




CDG-P103QSR




CDG-P104QSR




CDG-P105QSR



CDG-P106QSR



CDG-P107QSR



CDD-P118QSR

PIN ASSIGNMENT FRONT VIEW
(前視圖)

4	HEX NUT	Nylon + GF.	BLACK	1	
3	GASKET	EPDM.	BLACK	1	
2	CONTACT	Brass , 6 u" Gold Plated . Male Contact.		N	
1	CONNECTOR	D Size Male Connector Insert.Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE : Circular D Size Male Connector Male Pin Rear Mount Screw Type Square Flange Solder Bucket Pin
SCALE	1:1	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.25 .XX ± 0.1 .XXX ± 0.05 ANGLE ± 1°		
REV. A	SHEET 1/1	P/N: CDx-P1xxQSR DWG.NO: CDx-P1xxQSR
		DR. Patty CH. ERIC AP.