





RoHS

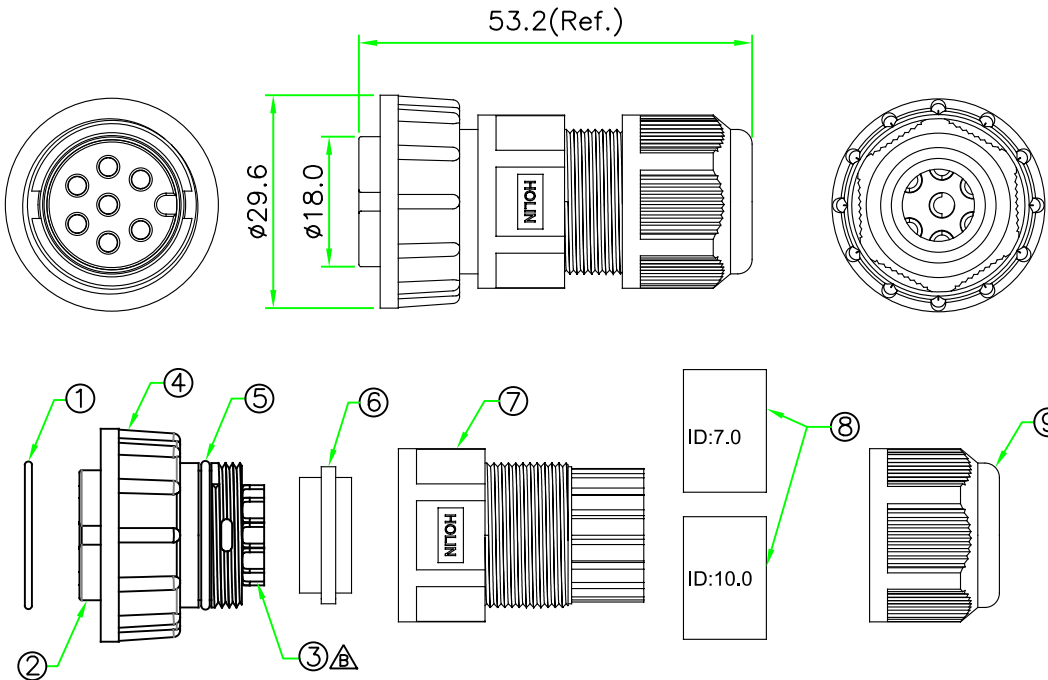

REV.	DESCRIPTION	DATE
A	ISSUE	Oct/29/2014
B	Change pin length & pack method.	Sep/13/2024

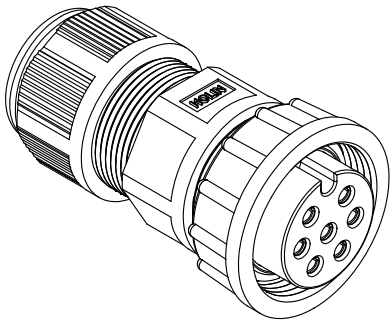

- NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 5A / 20A
CONNECTOR TEMPERATURE RANGE: -20°C TO +80°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. HOW TO ORDER: CDx-P2xxSA

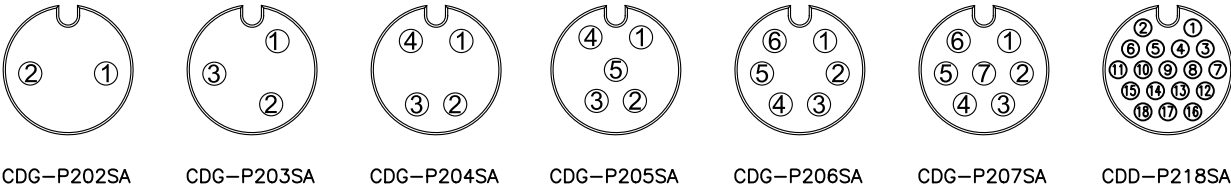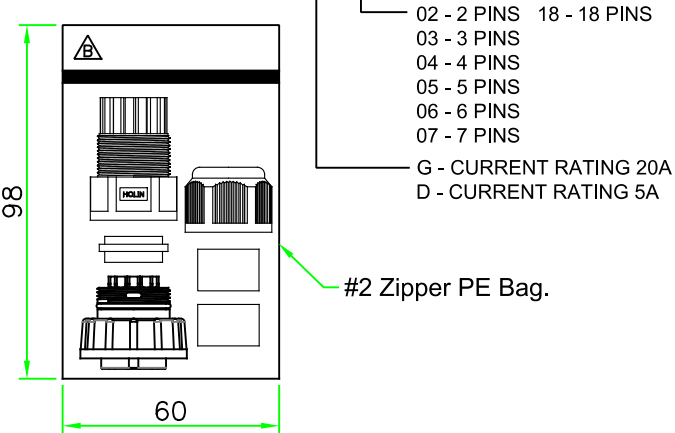

PIN ASSIGNMENT FRONT VIEW (前視圖)

9	CLAMP NUT	NYLON+GF	BLACK	1	
8	TUBE	EPDM, (ID= 7.0 & 10.0mm.)	BLACK	2	
7	HOOD	NYLON	BLACK	1	
6	GASKET	Rubber.	BLACK	1	
5	O-RING	NBR.	BLACK	1	
4	SCREW NUT	NYLON+GF	BLACK	1	
3	CONTACT	BRASS, Female Pin. 6u"Gold Plated.		N	
2	CONNECTOR	D Size Female Connector Insert, NYLON+GF.		1	
1	O-RING	EPDM	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE :	Circular D Size Screw Type Female Connector Female Pin Field Installable Plug	
SCALE	1:1	P/N:	CDx-P2xxSA	DR. JAMES
UNLESS OTHERWISE SPECIFIED TOLERANCES: xx. ±1.0 .x ±1.0 .xx ±0.5 .xxx ±0.25 ANGLE ± 1'		REV.	SHEET 1/1	CH. ERIC
B	1/1	DWG.NO:	CDx-P2xxSA	AP.