

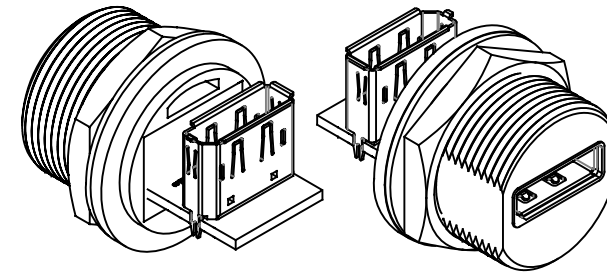
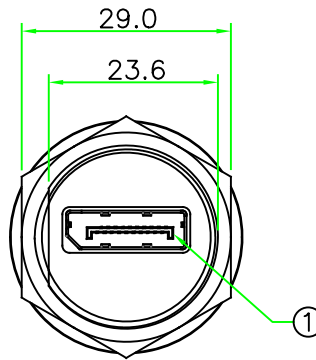

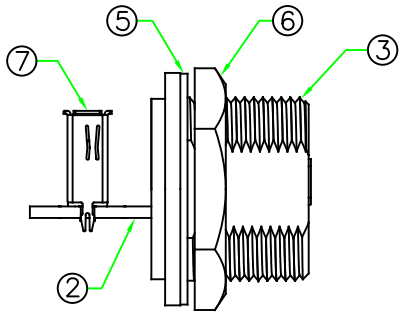
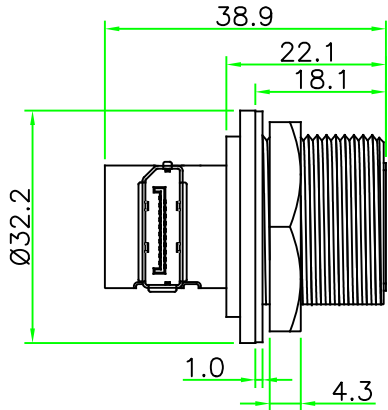


RECOMMEND
PANEL CUT OUT

RoHS



- NOTES:
- 1. Current Rating: 0.5A Per Contact.
 - 2. Voltage Rating: 40 VAC Max.
 - 3. Connector Temperature Range: -25°C to 85°C
 - 4. Contact Resistance: ≤30mΩ
 - 5. Insulation Resistance: ≥100MΩ
 - 6. Dielectric Withstanding Voltage : 500V AC Min.
 - 7. Panel Thickness Max. 4.0mm



PIN ASSIGNMENT
FRONT VIEW
(前視圖)

7	CONNECTOR	DisplayPort 20P Female DIP Type Straight Connector.	BLACK	1	
6	HEX NUT	Nylon+GF.	BLACK	1	
5	GASKET	EPDM.	BLACK	1	
4	GLUE	Epoxy.	BLACK	1	
3	CONN. INSERT	Nylon+GF.	BLACK	1	
2	PCB	FR4 . 4 Layer PCB, 1.6mm Thickness.		1	
1	CONNECTOR	DisplayPort 20P Female SMT Type R/A Connector.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
	UNIT: mm	TITLE: DisplayPort Female D Size Panel Connector Rear Mount Screw Type Circular Flange With DisplayPort Straight Female Connector			
SCALE	1:1	P/N: DSPD-P3CRJ		DR. JAMES	
UNLESS OTHERWISE SPECIFIED TOLERANCES: xx. ± 0.5 .x ± 0.5 .xx ± 0.25 .xxx ± 0.1 ANGLE ± 1°		CH. ERIC			
REV. A	SHEET 1/1	DWG.NO: DSPD-P3CRJ		AP.	