

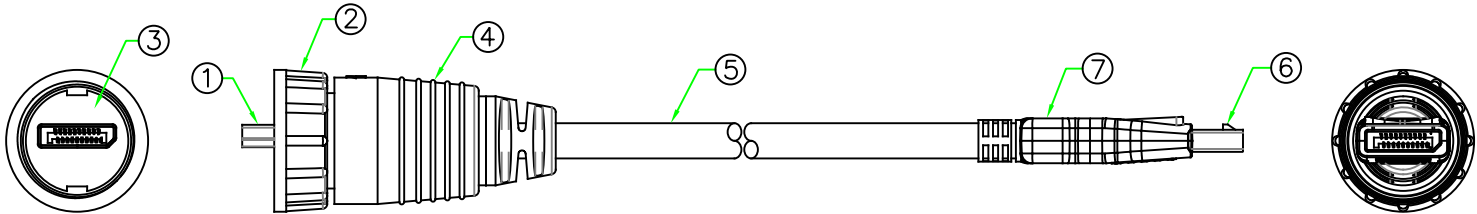
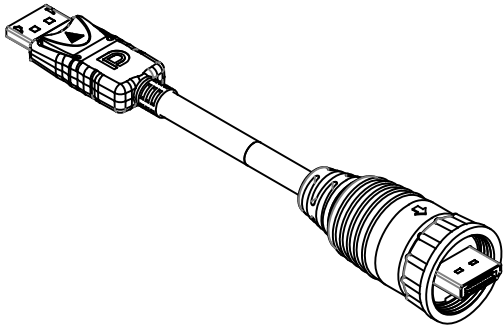


RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Aug/27/2025

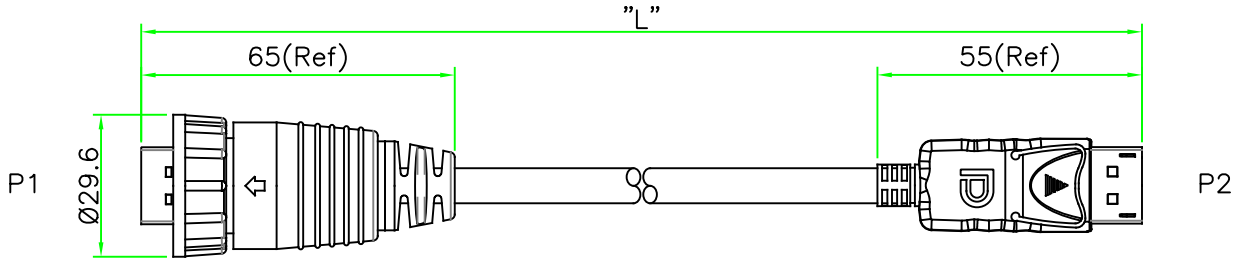

WIRING DIAGRAM		
P1		P2
1		12
3		10
2	●	11
4		9
6		7
5	●	8
7		6
9		4
8	●	5
10		3
12		1
11	●	2
13		13
14		14
15		15
17		17
16	●	16
18		18
19		19
SHELL		SHELL



PIN ASSIGNMENT
FRONT VIEW
(前視圖)

- NOTES:
1. Current Rating: 0.5A Per Contact.
 2. Voltage Rating: 40 VAC Max.
 3. Connector Temperature Range: -25°C to 85°C
 4. Contact Resistance: ≤30mΩ
 5. Insulation Resistance: ≥10MΩ
 6. Hi-Pot Test : SC 300V/10ms

PART NUMBER	"L"
DSPD-PB-020	2000±100mm
DSPD-PB-050	5000±200mm

7	OVERMOLD	PVC.	BLACK	1		HOLIN® HTP ASIA TECHNOLOGY CO., LTD.			
6	CONNECTOR	DisplayPort 20P Male Connector With Lock.	BLACK	1		禾凌科技股份有限公司			
5	CABLE	(28AWGx2C+Drain+AL+Mylar)x5C+28AWGx5C+Mylar+AL+Braid. UL20276. OD=7.3mm.	BLACK	1			UNIT: mm	TITLE: DisplayPort D Size Molded Cable Waterproof Male to Non-waterproof Male Plug	
						\$SCALE	1:1		
4	OVERMOLD	PVC.	BLACK	1	29-135-N11	UNLESS OTHERWISE SPECIED TOLERANCES: xx. ± 1.0 .x ± 1.0 .xx ± 0.5 .xxx± 0.25 ANGLE ± 1°		P/N: DSPD-PB-xxx	DR. JAMES
3	GASKET	EPDM.	BLACK	1					CH. ERIC
2	SCREW NUT	Nylon+GF.	BLACK	1					
1	CONNECTOR	DisplayPort 20P Male Connector Without Lock.	BLACK	1		REV.	SHEET	DWG.NO: DSPD-PB-xxx	AP.
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	A	1/1	DSPD-PB-xxx	