
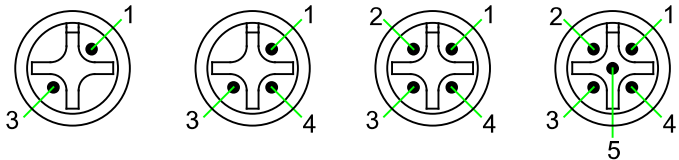
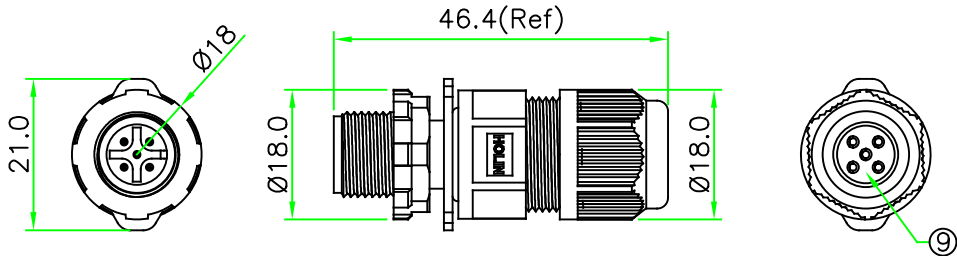
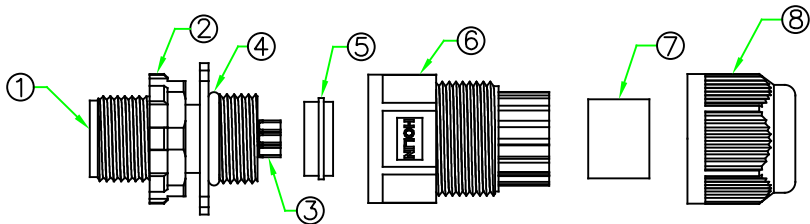


RoHS

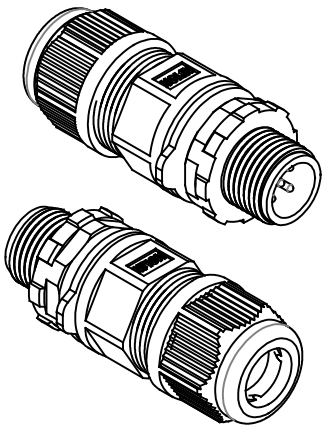


A12D-P102SA A12D-P103SA A12D-P104SA A12D-P105SA

PIN ASSIGNMENT FRONT VIEW (前視圖)

- NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING : 4A
VOLTAGE RATING : 2~4 PINS 250V a.c. or d.c.
5 PINS 60V a.c. or d.c.
CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. HOW TO ORDER: A12D-P1xxSA
 02 - 2 PINS
 03 - 3 PINS
 04 - 4 PINS
 05 - 5 PINS

#2 Zipper PE Bag.

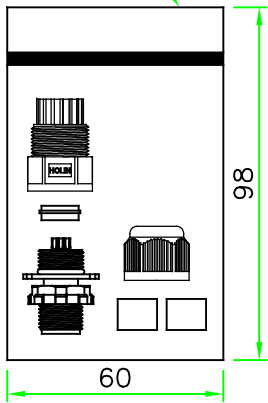

9	GLUE	Epoxy.	BLACK	1	
8	CLAMP NUT	Nylon+GF.	BLACK	1	
7	TUBE	EPDM. (ID=5.0 & 8.0mm)	BLACK	2	
6	HOOD	Nylon.	BLACK	1	
5	GASKET	SILICON.	BLACK	1	
4	O-RING	EPDM.	BLACK	1	
3	CONTACT	BRASS, Male Pin. 6u" Gold Plated.		N	
2	SCREW NUT	Nylon+GF.	BLACK	1	
1	CONNECTOR	M12 A-Coding Male Connector Insert. Nylon.		1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

UNIT: mm	TITLE : M12 A-Coding Male Connector Male Pin All Plastic Field Installable Plug
SCALE 1:1	
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX. ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ±1°	P/N: A12D-P1xxSA DR. JAMES CH. ERIC
REV. A SHEET 1/1	DWG.NO: A12D-P1xxSA AP.