
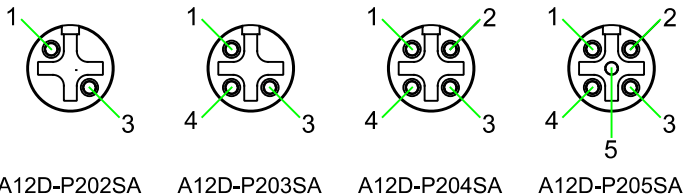
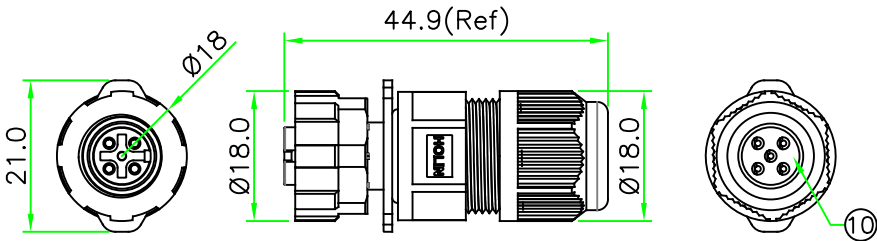
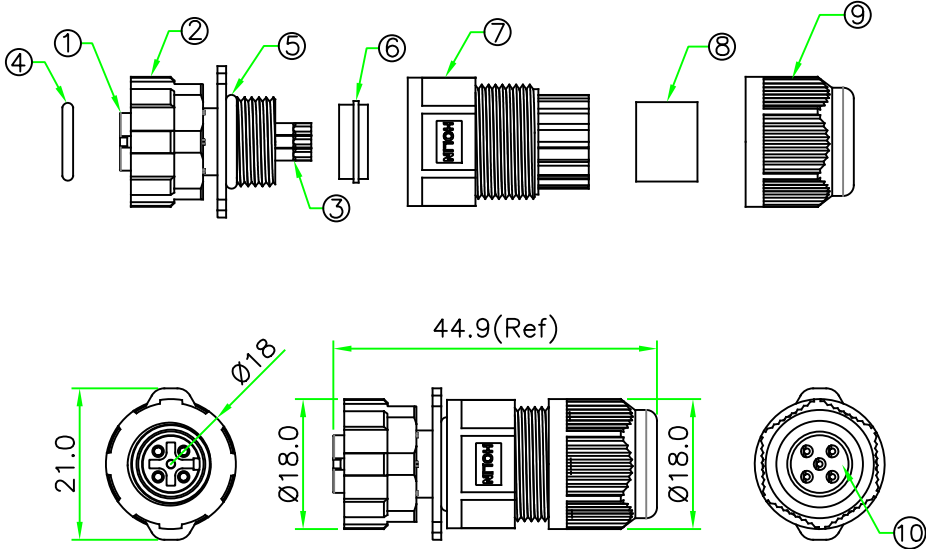


RoHS

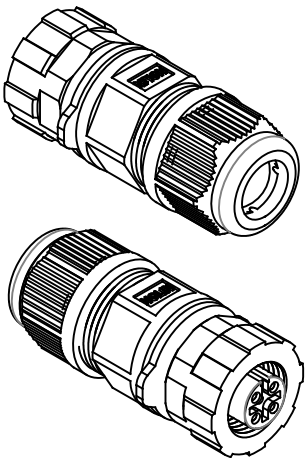


PIN ASSIGNMENT FRONT VIEW (前視圖)

10	GLUE	Epoxy.	BLACK	1	
9	CLAMP NUT	Nylon+GF.	BLACK	1	
8	TUBE	EPDM. (ID=5.0 & 8.0mm)	BLACK	2	
7	HOOD	Nylon.	BLACK	1	
6	GASKET	SILICON.	BLACK	1	
5	O-RING	SILICON.	BLACK	1	0-1015-SK02
4	O-RING	VITON.	BLACK	1	
3	CONTACT	BRASS, Female Pin. 6u" Gold Plated.		N	
2	RING NUT	Nylon+GF.		1	
1	CONNECTOR	M12 A-Coding Female Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

REV.	DESCRIPTION	DATE
A	ISSUE	Sep/19/2025

- NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING : 4A
VOLTAGE RATING : 2~4 PINS 250V a.c. or d.c.
5 PINS 60V a.c. or d.c.
CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. HOW TO ORDER: A12D-P2xxSA
02 - 2 PINS
03 - 3 PINS
04 - 4 PINS
05 - 5 PINS

#2 Zipper PE Bag.

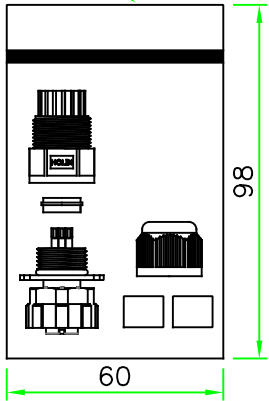

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
		UNIT: mm	TITLE : M12 A-Coding Female Connector Female Pin All Plastic Field Installable Plug		
SCALE		1:1	P/N: A12D-P2xxSA		DR. JAMES
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX. ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ±1°			DWG.NO: A12D-P2xxSA		CH. ERIC
REV. A	SHEET 1/1				AP.