


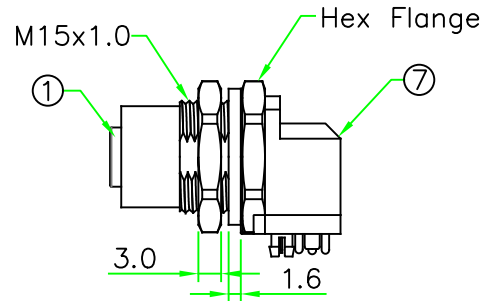

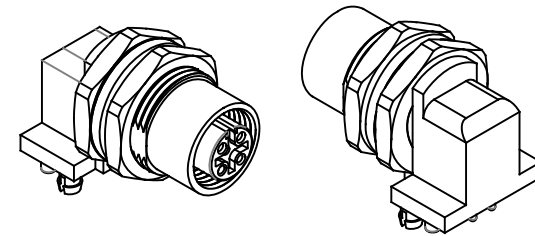


REV.	DESCRIPTION	DATE
A	ISSUE	Jun/07/2024





2. HOW TO ORDER: A12D-S2_{xx}HPRR


05 - 5 PINS




PIN ASSIGNMENT FRONT VIEW(前視圖)

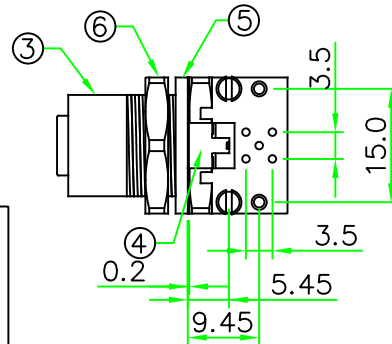

A12D-S203HPRR




A12D-S204HPRR



A12D-S205HPRR

PCB LAYOUT

8	O-RING	Viton.	BLACK	1	
7	HOLDER	Nylon+GF.	BLACK	1	
6	HEX NUT	Brass, Nickel Plated.		1	
5	GASKET	EPDM.	BLACK	1	
4	GROUND LUG	Brass, Nickel Plated.		1	
3	METAL BODY	Brass, Nickel Plated.		1	
2	CONTACT	Brass, 6 u" Gold Plated. Female Contact.		N	
1	CONNECTOR	M12 A-Coding Female Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

	UNIT:mm	TITLE M12 A-Coding Female Panel Connector Rear Mount Hex Flange R/A PCB Pin With Shield Lug
SCALE	1:1	

UNLESS OTHERWISE SPECIFIED TOLERANCES: $XX \pm 0.5$ $.X \pm 0.5$, $XX \pm 0.25$ $.XXX \pm 0.1$ ANGLE $\pm 1^\circ$		P/N: A12D-S2xxHPRR	DR. SIBYL
			CH. JAMES
REV.	SHEET	DWG.NO:	AP.
A	1/1	A12D-S2xxHPRR	