


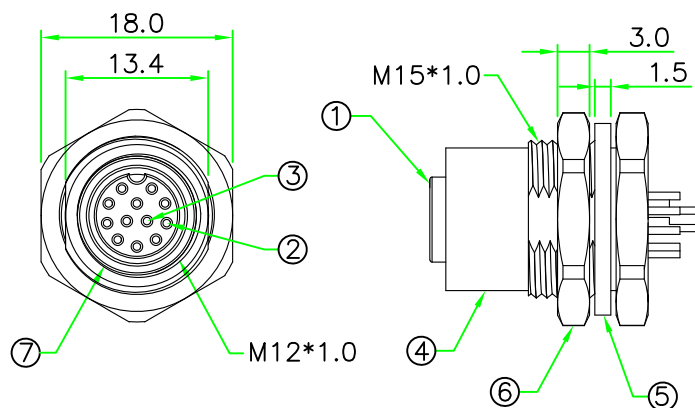


Recommended
Panel Cut-Out

RoHS

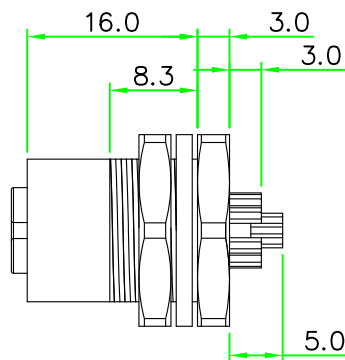

REV.	DESCRIPTION	DATE
B	ISSUE	Nov/03/2021

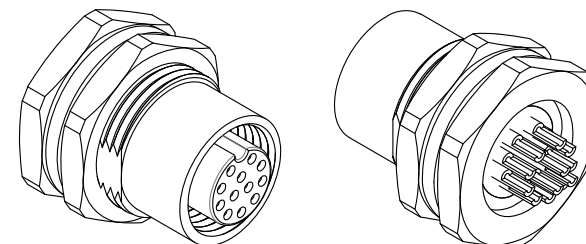


NOTES:

- ELECTRICAL CHARACTERISTICS:
VOLTAGE RATING: 30V a.c. or d.c.
CURRENT RATING: 1.5A
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
- PANEL THICKNESS MAX. 3.0mm
- HOW TO ORDER: A12I-M2xxHSR


09 - 09 PIN
10 - 10 PIN
11 - 11 PIN
12 - 12 PIN




A12I-M209HSR



A12I-M210HSR



A12I-M211HSR



A12I-M212HSR

PIN ASSIGNMENT FRONT VIEW (前視圖)

8	GLUE	EPOXY.	BLACK		
7	O-RING	VITON.	BLACK	1	
6	HEX NUT	BRASS.Nickel Plated.		1	
5	GASKET	EPDM.	BLACK	1	
4	HOUSING	BRASS.Nickel Plated.		1	
3	CONTACT	BRASS, 6 u" Gold Plated. Female Contact.		N	PF0.6SL23.5-01
2	CONTACT	BRASS, 6 u" Gold Plated. Female Contact.		9	M12F-0.6SPL21.5
1	CONNECTOR	M12 A-Coding Female Connector Insert. NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE	M12 A-Coding Female Panel Connector Rear Mount Hex Flange With Solder Bucket Pin	
SCALE	1.5:1	P/N:	A12I-M212HSR	DR. James
UNLESS OTHERWISE SPECIFIED TOLERANCES: X ±0.25 XX ±0.1 XXX ±0.05 ANGLE ± 1°				CH. Eric
REV.	B	SHEET	1/1	DWG.NO: A12I-M212HSR
				AP.