



Recommended
Panel Cut-Out

RoHS

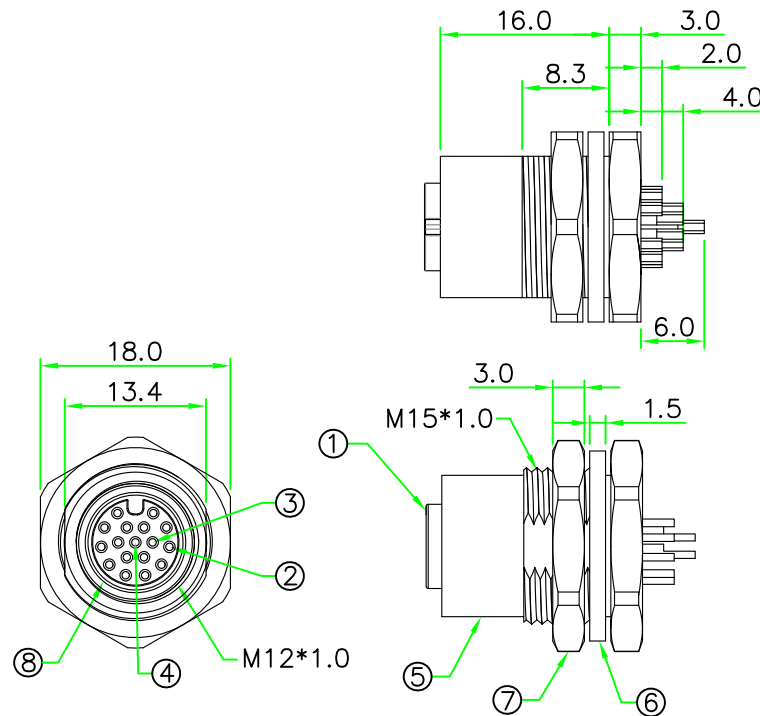


REV.	DESCRIPTION	DATE
A	ISSUE	Nov/05/2021

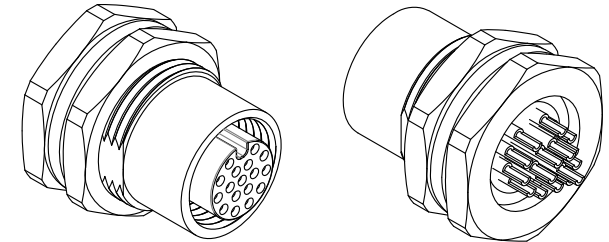

NOTES:

- ELECTRICAL CHARACTERISTICS:
VOLTAGE RATING: 30V a.c. or d.c.
CURRENT RATING: 1.5A
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
- PANEL THICKNESS MAX. 3.0mm
- HOW TO ORDER: A12I-M2xxHSR

13 - 13 PIN
14 - 14 PIN
15 - 15 PIN
16 - 16 PIN
17 - 17 PIN

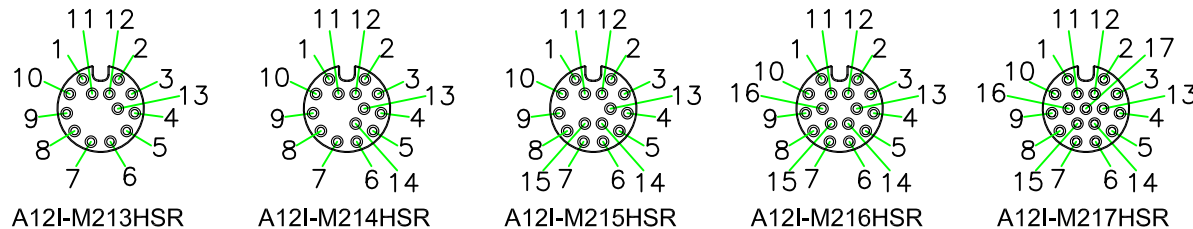

PIN ASSIGNMENT FRONT VIEW (前視圖)

9	GLUE	EPOXY.	BLACK		
8	O-RING	VITON.	BLACK	1	
7	HEX NUT	BRASS.Nickel Plated.		1	
6	GASKET	EPDM.	BLACK	1	
5	HOUSING	BRASS.Nickel Plated.		1	
4	CONTACT	BRASS, 6 u" Gold Plated. Female Contact.		N	PF0.6SL24.5-01
3	CONTACT	BRASS, 6 u" Gold Plated. Female Contact.		N	PF0.6SL22.5-01
2	CONTACT	BRASS, 6 u" Gold Plated. Female Contact.		10	PF0.6SL20.5-01
1	CONNECTOR	M12 A-Coding Female Connector Insert. NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE M12 A-Coding Female Panel Connector Rear Mount Hex Flange With Solder Bucket Pin		
SCALE	1.5:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES: X ±0.25 XX ±0.1 XXX ±0.05 ANGLE ± 1°		P/N: A12I-M217HSR		DR. James
REV. A		DWG.NO: A12I-M217HSR		CH. Eric
SHEET 1/1				AP.