
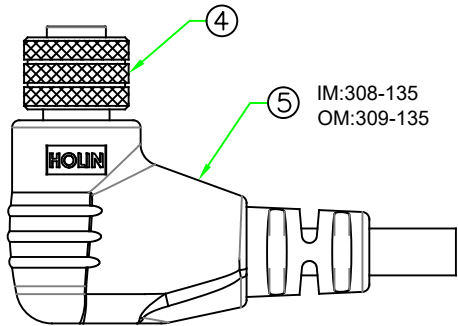
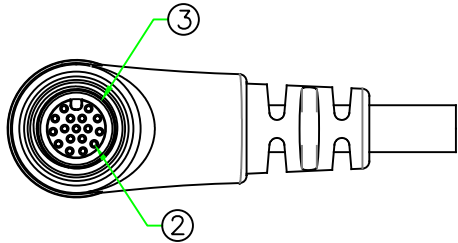
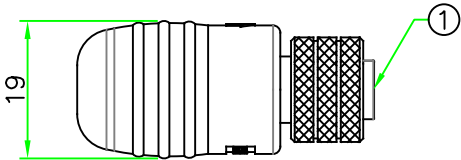
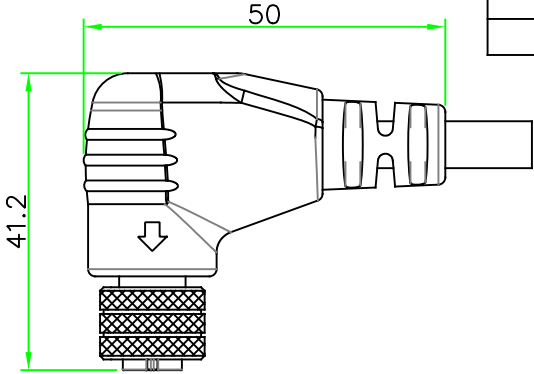
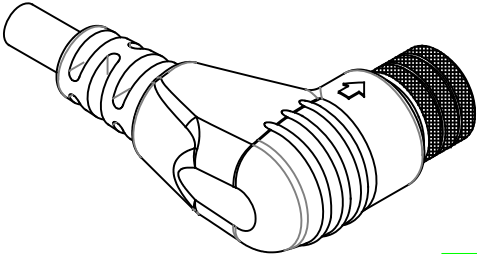



RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Sep/26/2023

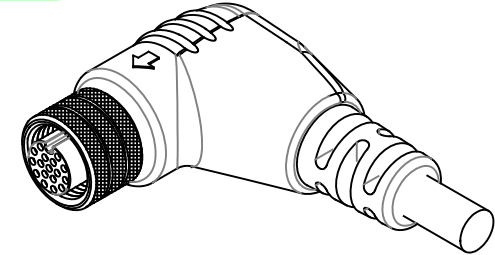

IM:308-135
OM:309-135

- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING : 1.5A
VOLTAGE RATING : 30V a.c. or d.c.
TEMPERATURE RANGE : -20°C TO +80°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - HOW TO ORDER: A12I-M2xxRM
- 09 - 09 PINS
 - 10 - 10 PINS
 - 11 - 11 PINS
 - 12 - 12 PINS
 - 13 - 13 PINS
 - 14 - 11 PINS
 - 15 - 15 PINS
 - 16 - 16 PINS
 - 17 - 17 PINS

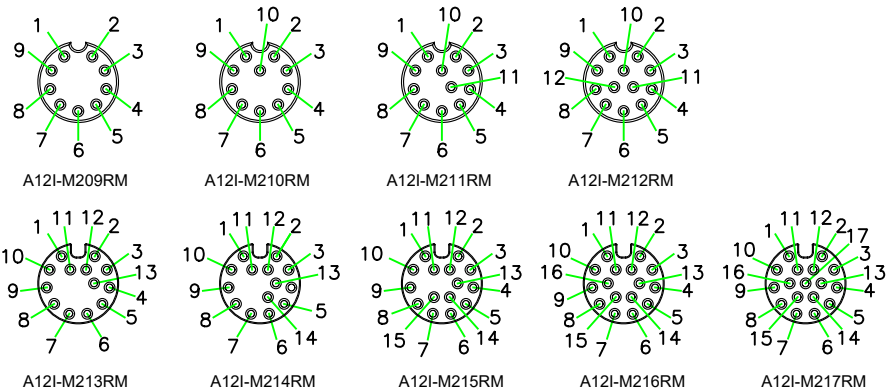

PIN ASSIGNMENT FRONT VIEW (前視圖)

5	OVERMOLD	PVC or PU.	BLACK	1	
4	RING NUT	BRASS, Nickel Plated.		1	
3	O-RING	VITON	BLACK	1	
2	CONTACT	BRASS , 6u" Gold Plated. Female Pin.		N	
1	CONNECTOR	M12 A-Coding Female Connector Insert, NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
UNIT: mm	SCALE	TITLE			
1:1		M12 A-Coding Female Connector R/A Molded Cable Ass'y			
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX. ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ± 1°		P/N:	A12I-M2xxRM	DR. James	
REV.		SHEET	DWG.NO:	CH. Eric	
A	1/1		A12I-M2xxRM	AP.	