
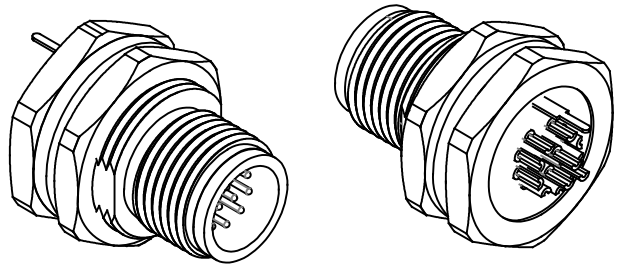

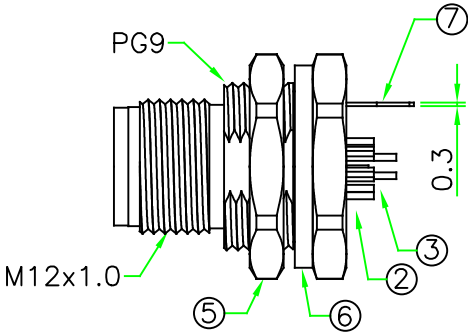
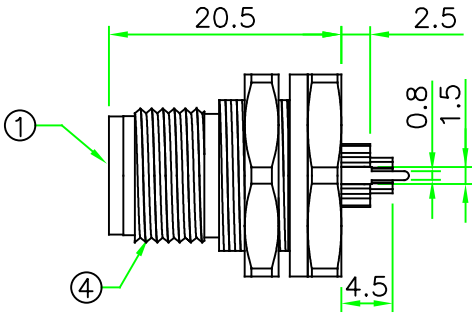


Recommended
Panel Cut Out


RoHS

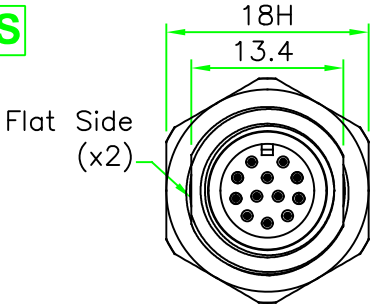

NOTES:

1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 1.5A
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. PANEL THICKNESS MAX. 3.0mm
3. HOW TO ORDER: A12I-S1xxHSR

09 - 09 PINS
10 - 10 PINS
11 - 11 PINS
12 - 12 PINS

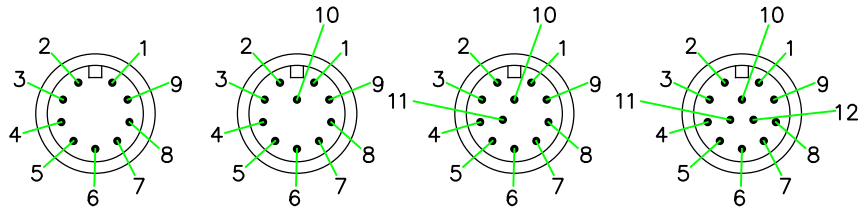

A12I-S109HSR

A12I-S110HSR

A12I-S111HSR

A12I-S112HSR

PIN ASSIGNMENT FRONT VIEW (前視圖)

8	GLUE	Epoxy.	BLACK		
7	SHIELD PIN	Brass, Nickel Plated.		1	
6	GASKET	EPDM.	BLACK	1	
5	HEX NUT	Brass, Nickel Plated.		1	
4	HOUSING	Brass, Nickel Plated.		1	
3	CONTACT	Brass, 6 u" Gold Plated. Male Contact.		N	
2	CONTACT	Brass, 6 u" Gold Plated. Male Contact.		9	
1	CONNECTOR	M12 A-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
	UNIT: mm	TITLE M12 A-Coding Male PanelConnector Rear Mount Hex Flange With Solder Bucket & Shielded Pin			
	SCALE 1:1				
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX. ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°		P/N: A12I-S112HSR		DR. SIBYL	
REV. A		SHEET 1/1		CH. JAMES	
		DWG.NO: A12I-S112HSR		AP.	