

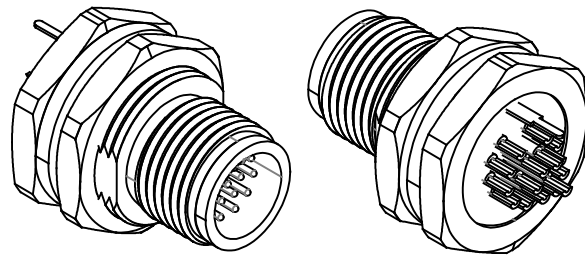

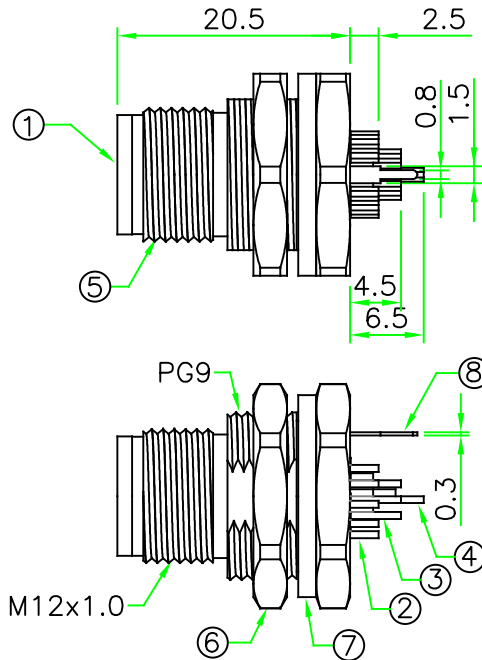



RoHS

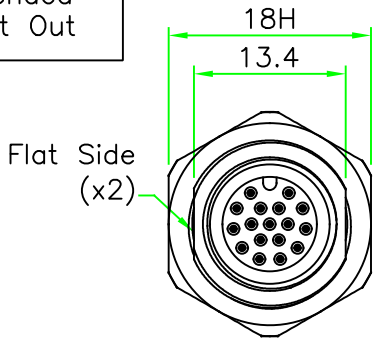


- NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 1.5A
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 2. PANEL THICKNESS MAX. 3.0mm
 3. HOW TO ORDER: A12I-S1xxHSR




A12I-S113HSR




A12I-S114HSR



A12I-S115HSR



A12I-S116HSR



A12I-S117HSR

- 13 - 13 PINS
14 - 14 PINS
15 - 15 PINS
16 - 16 PINS
17 - 17 PINS

PIN ASSIGNMENT FRONT VIEW (前視圖)

9	GLUE	Epoxy.	BLACK		
8	SHIELD PIN	Brass, Nickel Plated.		1	
7	GASKET	EPDM.	BLACK	1	
6	HEX NUT	Brass, Nickel Plated.		1	
5	HOUSING	Brass, Nickel Plated.		1	
4	CONTACT	Brass, 6 u" Gold Plated. Male Contact.		N	
3	CONTACT	Brass, 6 u" Gold Plated. Male Contact.		N	
2	CONTACT	Brass, 6 u" Gold Plated. Male Contact.		10	
1	CONNECTOR	M12 A-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
		UNIT: mm	TITLE M12 A-Coding Male Panel Connector Rear Mount Hex Flange With Solder Bucket & Shielded Pin		
SCALE		1.5:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N:		DR. SIBYL	
XX ± 0.5		A12I-S117HSR		CH. JAMES	
.X ± 0.5 .XX ± 0.25					
.XXX ± 0.1 ANGLE ± 1°					
REV.		SHEET		DWG.NO:	
A		1/1		A12I-S117HSR	
				AP.	