
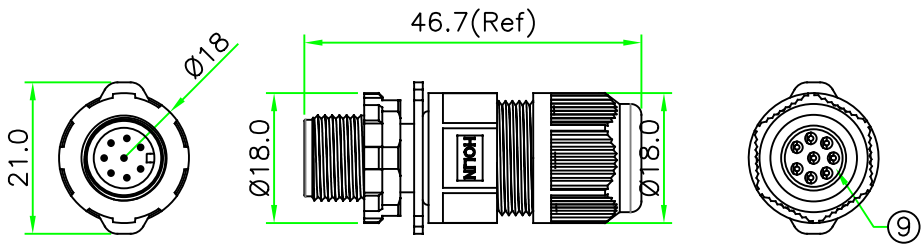
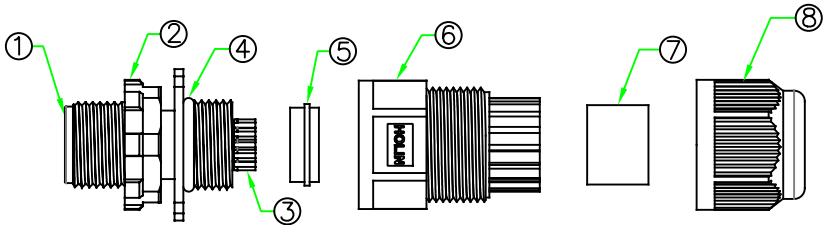





RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Sep/03/2026



- NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING : 2A
VOLTAGE RATING : 30V a.c. or d.c.
CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. HOW TO ORDER: A12N-P1xxSA
06 - 6 PINS
07 - 7 PINS
08 - 8 PINS

#2 Zipper PE Bag.

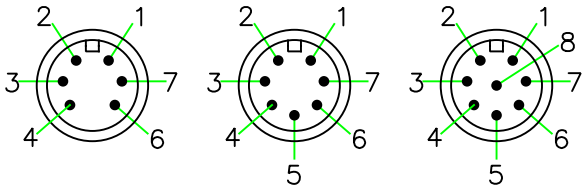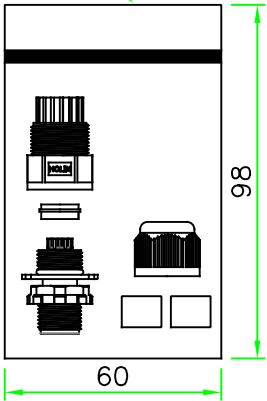

A12N-P106SA A12N-P107SA A12N-P108SA
PIN ASSIGNMENT FRONT VIEW (前視圖)

9	GLUE	Epoxy.	BLACK	1	
8	CLAMP NUT	Nylon+GF.	BLACK	1	
7	TUBE	EPDM. (ID=5.0 & 8.0mm)	BLACK	2	
6	HOOD	Nylon.	BLACK	1	
5	GASKET	SILICON.	BLACK	1	
4	O-RING	SILICON.	BLACK	1	0-1015-SK02
3	CONTACT	BRASS, Male Pin. 6u" Gold Plated.		N	
2	RING NUT	Nylon+GF.		1	
1	CONNECTOR	M12 A-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
	UNIT: mm	TITLE : M12 A-Coding Male Connector Male Pin All Plastic Field Installable Plug			
SCALE	1:1	P/N: A12N-P1xxSA		DR. JAMES	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX. ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ± 1°		DWG.NO: A12N-P1xxSA		CH. ERIC	
REV. A	SHEET 1/1			AP.	