

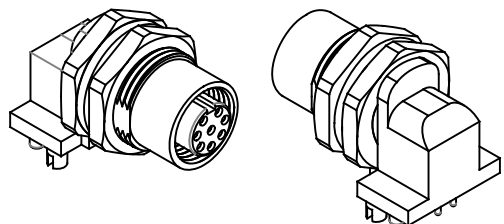
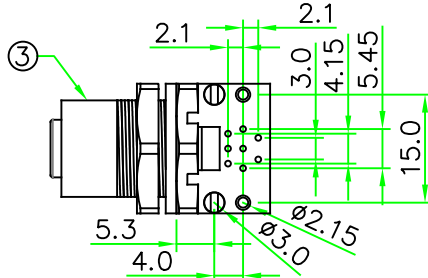

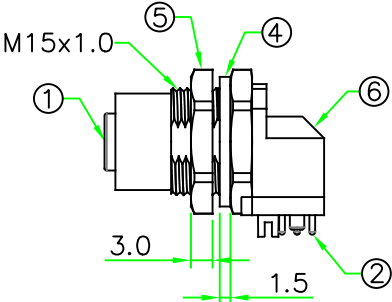



Recommended
Panel Cut Out


RoHS

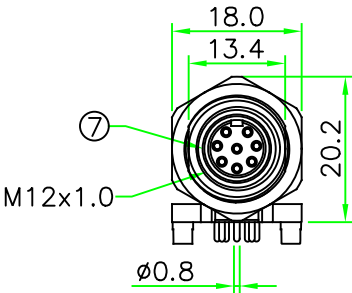

- NOTES:
- 1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 2A
VOLTAGE RATING : a.c./d.c. 30V
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - 2. HOW TO ORDER: A12N-P2xxHPRR
06 - 6 PINS
07 - 7 PINS
08 - 8 PINS

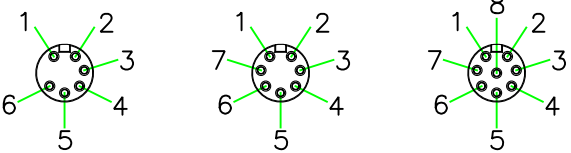

A12N-P206HPRR A12N-P207HPRR A12N-P208HPRR
PIN ASSIGNMENT FRONT VIEW(前視圖)

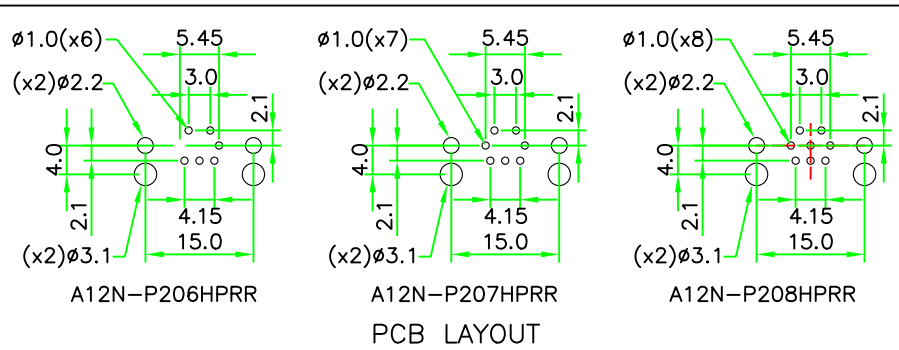

7	O-RING	VITON.	BLACK	1	
6	HOLDER	Nylon+GF.	BLACK	1	
5	HEX NUT	Nylon+GF.	BLACK	1	
4	GASKET	EPDM.	BLACK	1	
3	HOUSING	Nylon+GF.	BLACK	1	
2	CONTACT	BRASS, 6 u" Gold Plated. Female Contact.		N	
1	CONNECTOR	M12 A-Coding Female Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司						
		UNIT: mm	TITLE M12 A-Coding Female Plastic Panel Rear Mount Hex Flange Connector With R/A PCB Pin			
SCALE		1:1				
UNLESS OTHERWISE SPECIED TOLERANCES: xx. ± 0.5 .x ± 0.5 .xx ± 0.25 .xxx± 0.1 ANGLE ± 1°			P/N: A12N-P2xxHPRR	DR.	James	
				CH.	Eric	
			REV.	SHEET	DWG.NO:	AP.
			A	1/1	A12N-P2xxHPRR	