




RoHS

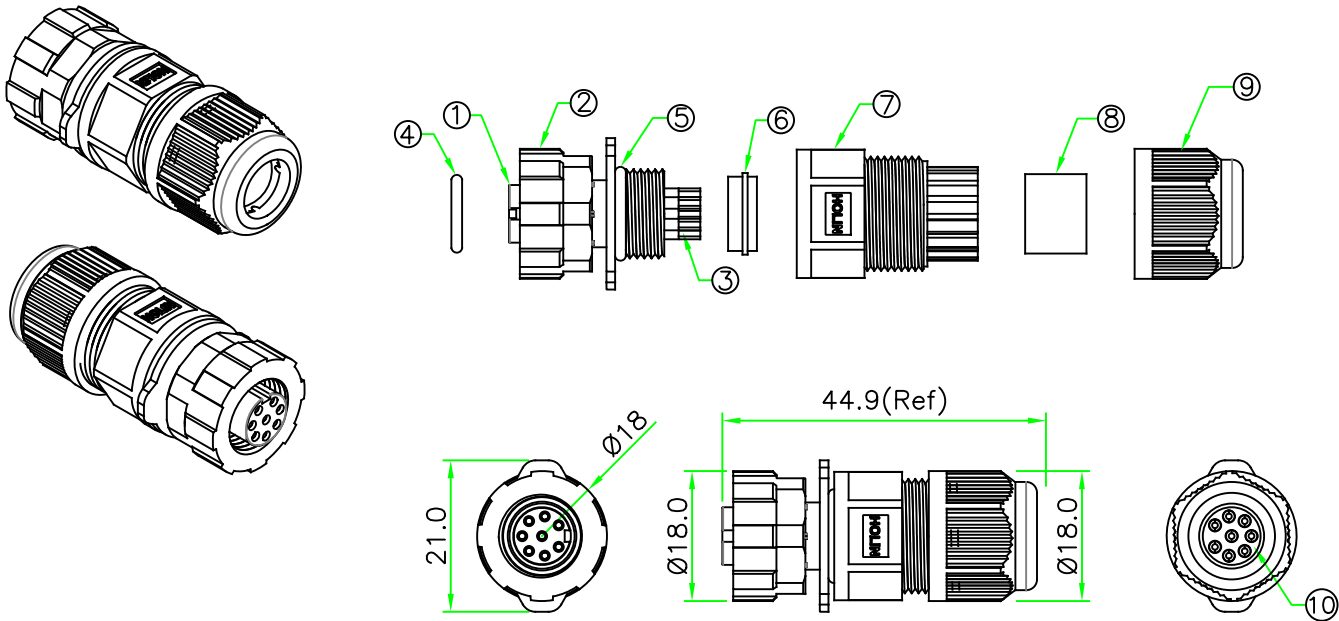

REV.	DESCRIPTION	DATE
A	ISSUE	Sep/02/2026

NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING : 2A
VOLTAGE RATING : 30V a.c. or d.c.
CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. HOW TO ORDER: A12N-P2xxSA
06 - 6 PINS
07 - 7 PINS
08 - 8 PINS

#2 Zipper PE Bag.

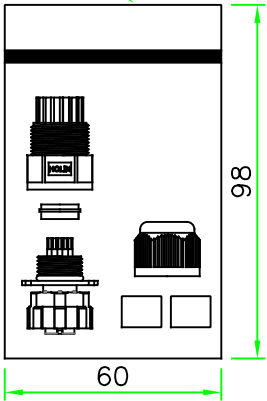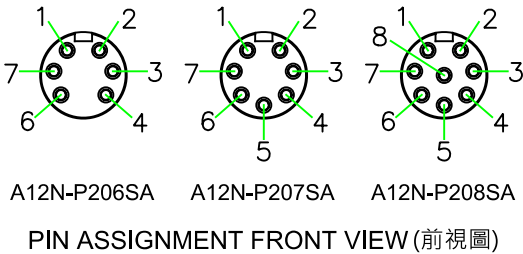

10	GLUE	Epoxy.	BLACK	1	
9	CLAMP NUT	Nylon+GF.	BLACK	1	
8	TUBE	EPDM. (ID=5.0 & 8.0mm)	BLACK	2	
7	HOOD	Nylon.	BLACK	1	
6	GASKET	SILICON.	BLACK	1	
5	O-RING	SILICON.	BLACK	1	0-1015-SK02
4	O-RING	VITON.	BLACK	1	
3	CONTACT	BRASS, Female Pin. 6u" Gold Plated.		N	
2	RING NUT	Nylon+GF.		1	
1	CONNECTOR	M12 A-Coding Female Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
UNIT: mm		TITLE : M12 A-Coding Female Connector Female Pin All Plastic Field Installable Plug			
SCALE 1:1		P/N: A12N-P2xxSA		DR. JAMES	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ±1°		DWG.NO: A12N-P2xxSA		CH. ERIC	
REV. A		SHEET 1/1		AP.	