
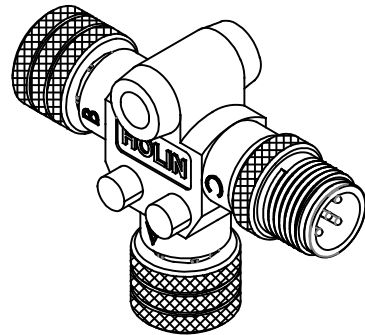
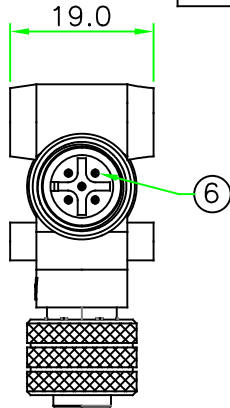


RoHS


REV.	DESCRIPTION	DATE
A	ISSUE	Oct/21/2024

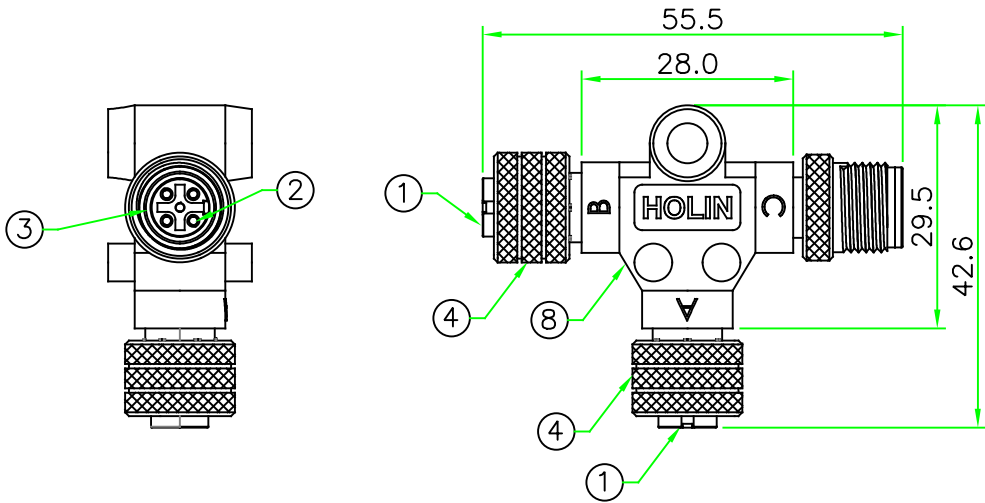


NOTES:

1. HOW TO ORDER: A12T-MFFMxxx


333 - 3 PINS
444 - 4 PINS
555 - 5 PINS

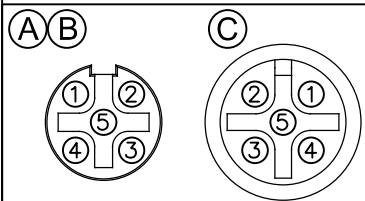

M12-xF M12-xM
PIN ASSIGNMENT
FRONT VIEW (前視圖)

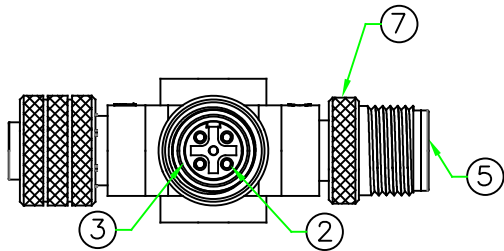

WIRING DIAGRAM

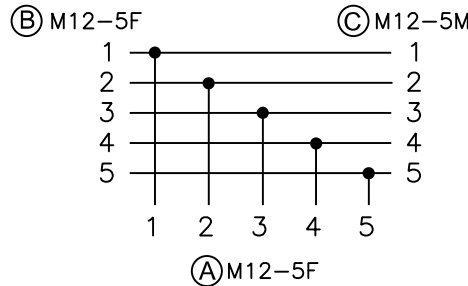

8	OVERMOLD	PU.	BLACK	1	
7	RING NUT	Brass. Nickel Plated.		1	
6	CONTACT	Brass. 6u" Gold Plated. Male Pin.		N	
5	CONNECTOR	M12 A-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
4	RING NUT	Brass. Nickel Plated.		2	
3	O-RING	Viton.	BLACK	2	
2	CONTACT	Brass. 6u" Gold Plated. Female Pin.		N	
1	CONNECTOR	M12 A-Coding Female Connector Insert. Nylon+GF.	BLACK	2	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司		UNIT: mm		TITLE M12 A CODE FEMALE TO FEMALE & MALE T ADAPTER	
SCALE 1:1		P/N: A12T-MFFMxxx		DR. SIBYL	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°		DWG.NO: A12T-MFFMxxx		CH. JAMES	
REV. A		SHEET 1/1		AP.	