

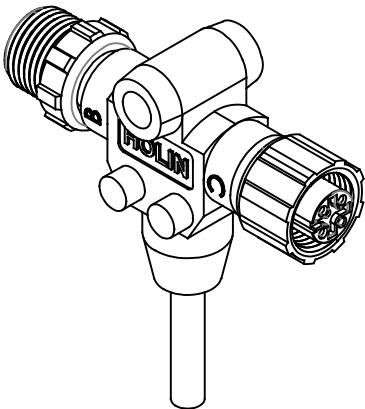
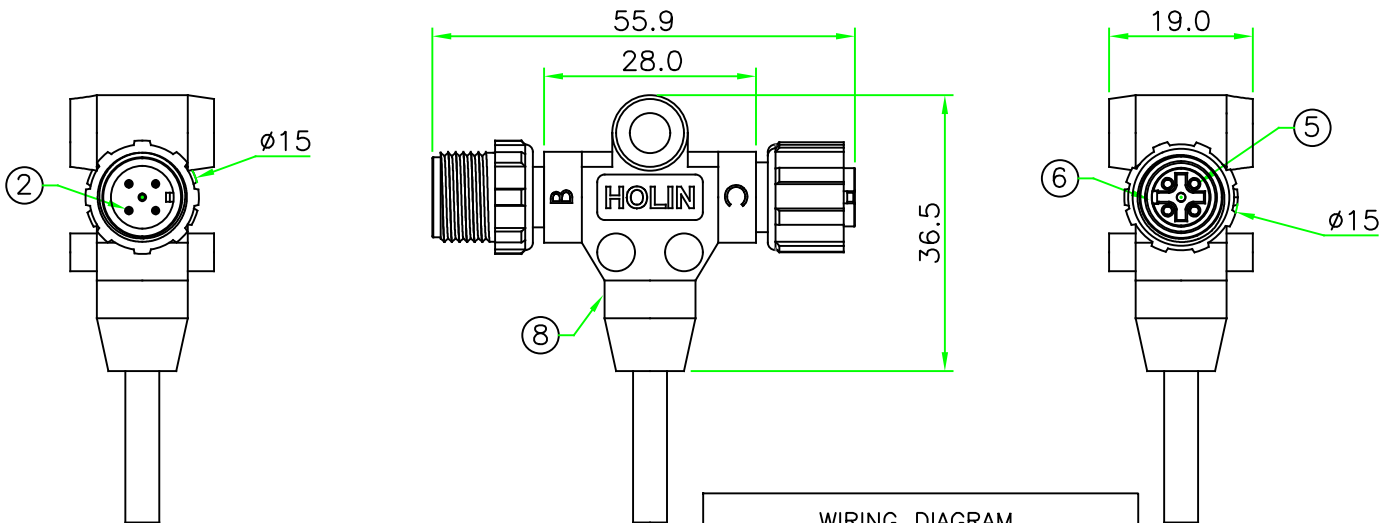
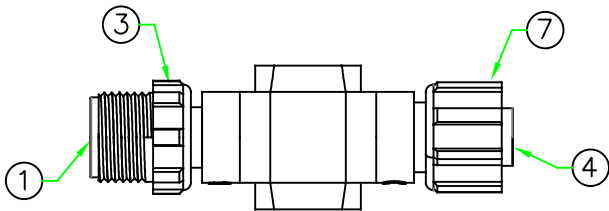


RoHS

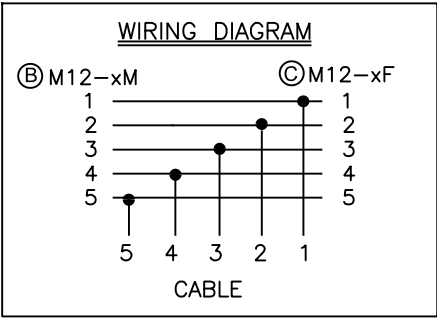

- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 4A
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - HOW TO ORDER: A12T-PCMF0xx
22 - 2 PINS
33 - 3 PINS
44 - 4 PINS
55 - 5 PINS
CONNECTOR GENDER



*Cable specification and length can be customized.

8	OVERMOLD	PU.	BLACK	1	
7	RING NUT	Nylon+GF.	BLACK	1	
6	O-RING	Viton.	BLACK	1	
5	CONTACT	Brass. 6u" Gold Plated. Female Pin.		N	
4	CONNECTOR	M12 A-Coding Female 5 Pin Connector Insert. Nylon+GF.	BLACK	1	
3	RING NUT	Nylon+GF.	BLACK	1	
2	CONTACT	Brass. 6u" Gold Plated. Male Pin.		N	
1	CONNECTOR	M12 A-Coding Male 5 Pin Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
UNIT: mm		TITLE M12 A Coding Male To Female All Plastic Molded Cable			
SCALE 1:1		P/N: A12T-PCMF0xx		DR. SIBYL	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX ± 1.0 .X ± 1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°		DWG.NO: A12T-PCMF0xx		CH. JAMES	
REV. A		SHEET 1/1		AP.	