




RoHS

REV.	DESCRIPTION	DATE
A	ISSUE	Nov/05/2024


- NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 4A
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. HOW TO ORDER: A12T-SFFM xxx

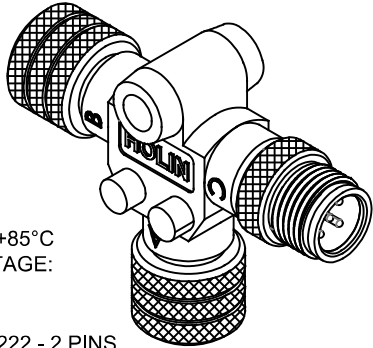

- 222 - 2 PINS
333 - 3 PINS
444 - 4 PINS
555 - 5 PINS
- CONNECTOR GENDER

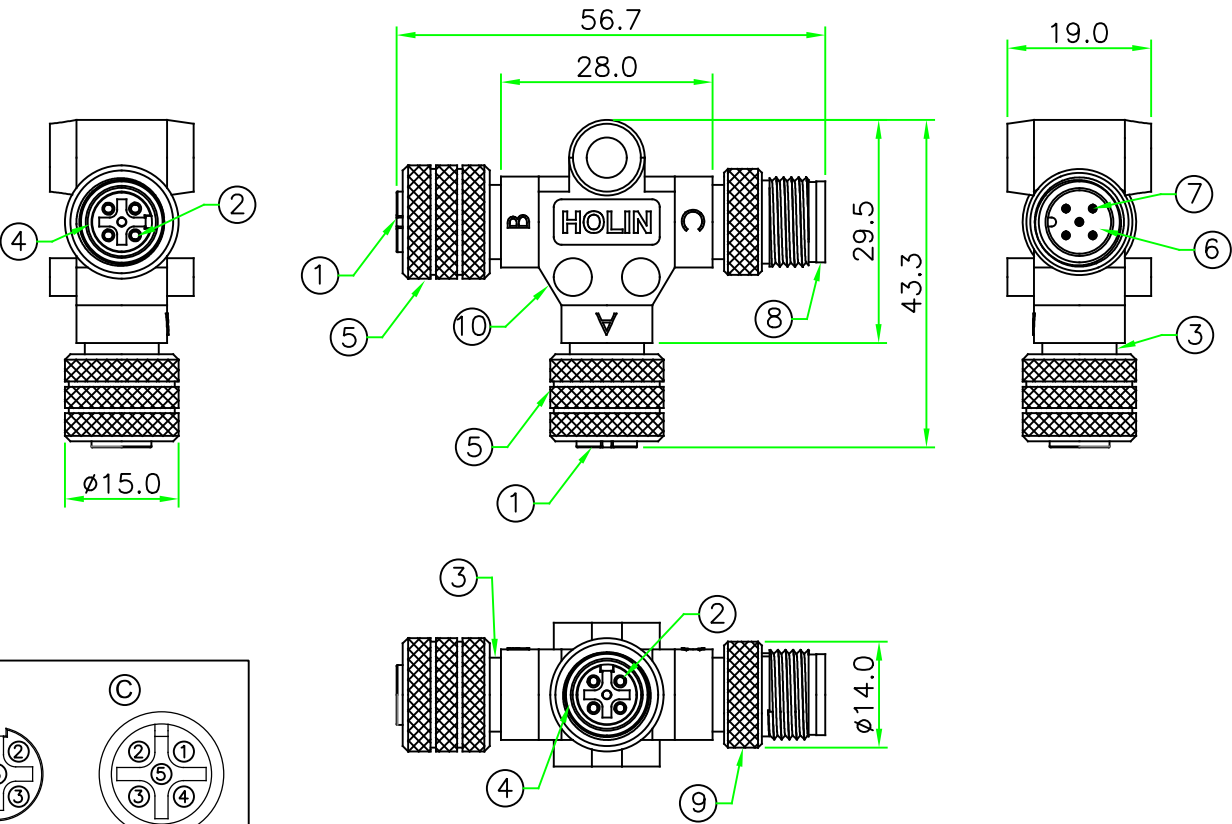

WIRING DIAGRAM

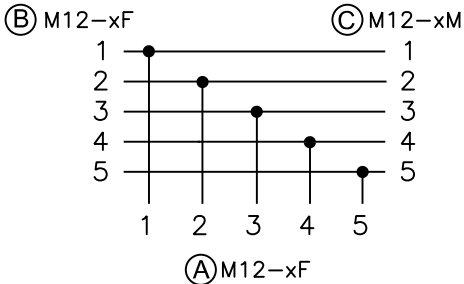

10	OVERMOLD	PU.	BLACK	1	
9	RING NUT	Brass. Nickel Plated.		1	
8	METAL SHELLE	Brass. Nickel Plated.		1	
7	CONTACT	Brass. 6u" Gold Plated. Male Pin.		N	
6	CONNECTOR	M12 A-Coding Male 5 Pin Connector Insert. Nylon+GF.	BLACK	1	
5	RING NUT	Brass. Nickel Plated.		2	
4	O-RING	Viton.	BLACK	2	
3	METAL SHELLE	Brass. Nickel Plated.		2	
2	CONTACT	Brass. 6u" Gold Plated. Female Pin.		N	
1	CONNECTOR	M12 A-Coding Female 5 Pin Connector Insert. Nylon+GF.	BLACK	2	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

UNIT: mm	TITLE	DR.
SCALE	M12 A Coding Female To Female/Male Shielded T ADAPTER	SIBYL
UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°	P/N:	CH.
REV.	A12T-SFFMxxx	JAMES
SHEET	DWG.NO:	AP.
A	1/1	A12T-SFFMxxx