
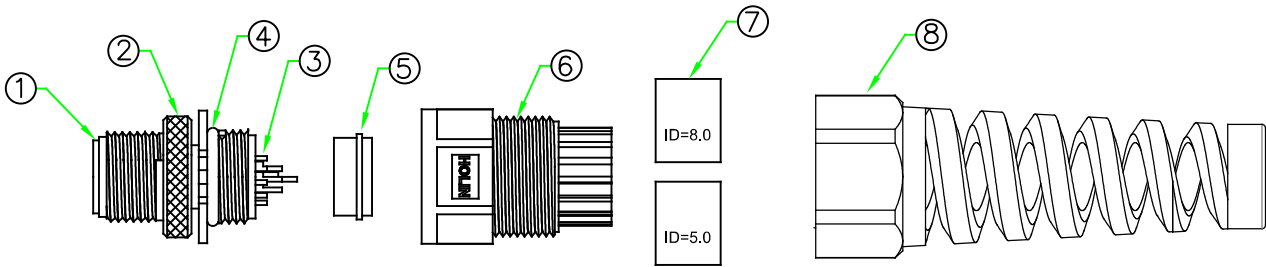
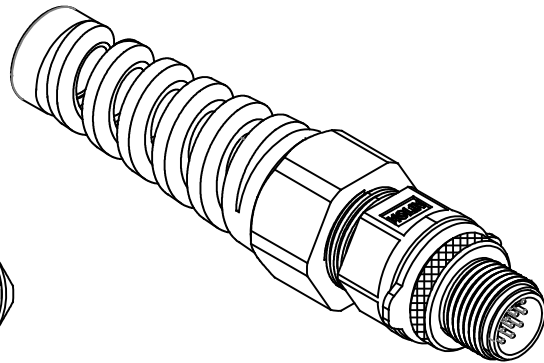

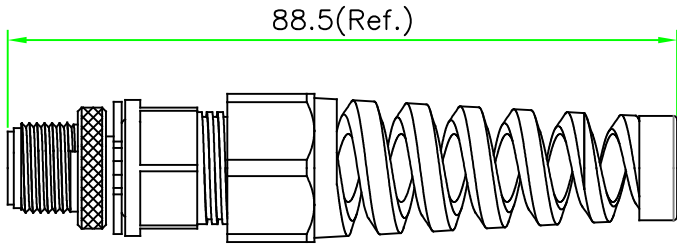



RoHS

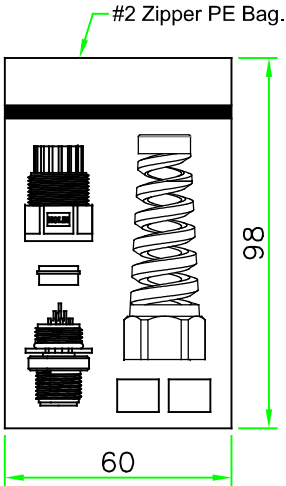


- NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 1.5A / 2A / 4A
CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. HOW TO ORDER: A12x-M1xxSAM
- | | |
|-------------|--------------|
| 02 - 2 PINS | 10 - 10 PINS |
| 03 - 3 PINS | 11 - 11 PINS |
| 04 - 4 PINS | 12 - 12 PINS |
| 05 - 5 PINS | 13 - 13 PINS |
| 06 - 6 PINS | 14 - 14 PINS |
| 07 - 7 PINS | 15 - 15 PINS |
| 08 - 8 PINS | 16 - 16 PINS |
| 09 - 9 PINS | 17 - 17 PINS |
- D - CURRENT RATING 4A
N - CURRENT RATING 2A
I - CURRENT RATING 1.5A


※Pin Assignment Next Page.

8	CLAMP NUT	Nylon.	BLACK	1	
7	TUBE	EPDM. (ID=5.0 & 8.0mm)	BLACK	2	
6	HOOD	Nylon.	BLACK	1	
5	GASKET	Silicon.	BLACK	1	
4	O-RING	Silicon.	BLACK	1	0-1015-SK02
3	CONTACT	Brass, Female Pin. 6u" Gold Plated.		N	
2	RING NUT	Brass, Nickel Plated.		1	
1	CONNECTOR	M12 A-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS


HOLIN® HTP ASIA TECHNOLOGY CO., LTD.		禾凌科技股份有限公司	
	UNIT: mm	TITLE	
	SCALE	M12 A-Coding Male Connector Male Pin With S/R Field Installable Plug	
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX, ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX± 0.1 ANGLE ± 1°	REV.	P/N:	DR. SIBYL
		A12x-M1xxSAM	CH. JAMES
A	SHEET 1/2	DWG.NO: A12x-M1xxSAM	AP.




A12D-M102SAM




A12D-M103SAM




A12D-M104SAM




A12D-M105SAM




A12N-M106SAM




A12N-M107SAM




A12N-M108SAM




A12I-M109SAM




A12I-M110SAM




A12I-M111SAM




A12I-M112SAM




A12I-M113SAM




A12I-M114SAM



A12I-M115SAM



A12I-M116SAM



A12I-M117SAM

PIN ASSIGNMENT FRONT VIEW
(前視圖)

HOLIN [®] HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司			
	UNIT: mm	TITLE M12 A-Coding Male Connector Male Pin With S/R Field Installable Plug	
SCALE	1:1		
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX, ± 0.5 .X ± 0.5 .XX ± 0.25 .XXX ± 0.1 ANGLE ± 1°		P/N: A12x-M1xxSAM	DR. SIBYL
REV. A		DWG.NO: A12x-M1xxSAM	CH. JAMES
SHEET 2/2			AP.