

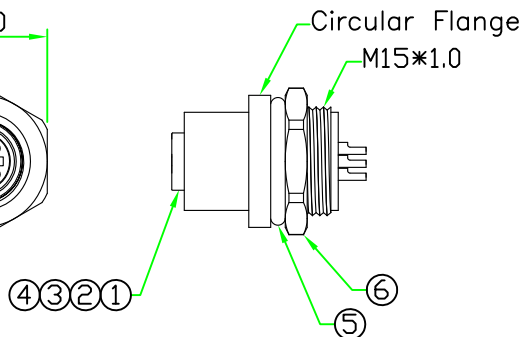



Recommended
Panel Cut-Out

RoHS

IP66~68



REV.	DESCRIPTION	DATE
A	ISSUE	Oct/06/2014

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 1.5A / 2A / 4A

TEMPERATURE RANGE: -25°C TO +85°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: A12x-M2xxCSF

02 - 2 PIN 08 - 8 PIN

03 - 3 PIN 09 - 9 PIN

04 - 4 PIN 10 - 10PIN

05 - 5 PIN 11 - 11PIN


06 - 6 PIN 12 - 12PIN

07 - 7 PIN

I - CURRENT RATING 1.5A

N - CURRENT RATING 2A

D - CURRENT RATING 4A

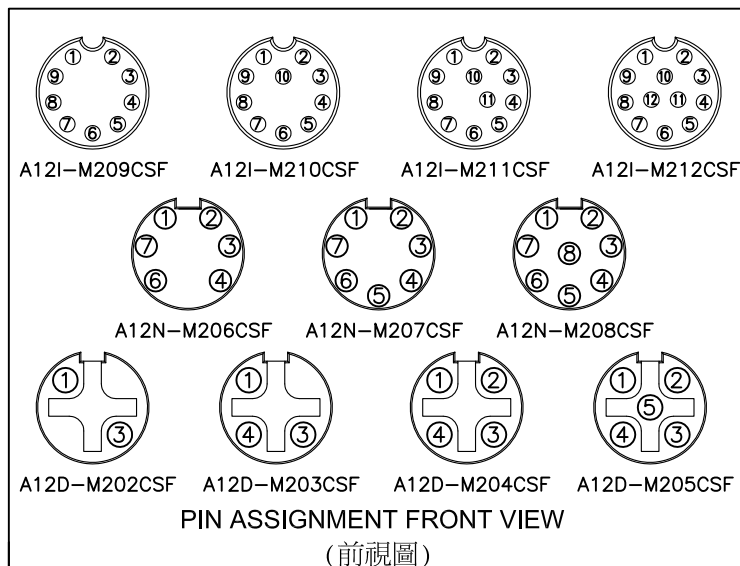

PIN ASSIGNMENT FRONT VIEW

(前視圖)

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE :	M12 A-Coding Female Panel Front mount Circular Flange Solder Bucket Pin Connector
SCALE	1:1	P/N:	A12x-M2xxCSF
UNLESS OTHERWISE SPECIFIED TOLERANCES: .X ± 0.25 .XX ± 0.1 .XXX ± 0.05 ANGLE ± 1°	REV.	DWG.NO:	A12x-M2xxCSF
A	SHEET 1/1	DR.	Patty
		CH.	ERIC
		AP.	

6	HEX NUT	Brass, Nickel Plated.		1	
5	O-RING	Silcon.	BROWN	1	
4	O-RING	VITON.	BLACK	1	
3	HOUSING	Brass, Nickel Plated.		1	
2	CONTACT	Brass , 6 u" Gold Plated .Female Contact.		N	
1	CONNECTOR	M12 A-Coding Female Connector Insert.NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS