



RoHS

2,3,4,5, PINS

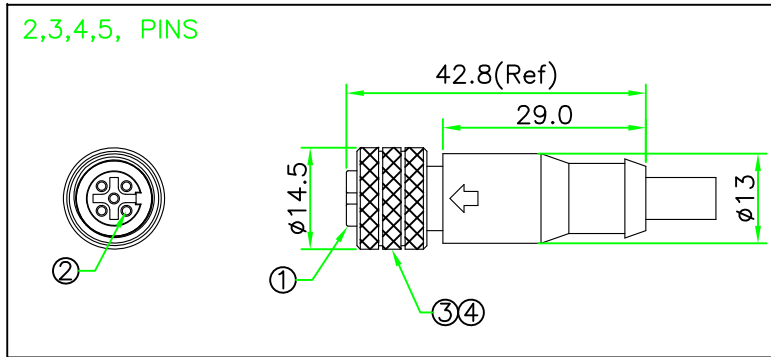


6,7,8,9,10,11,12,13,14,15,16,17 PINS B2

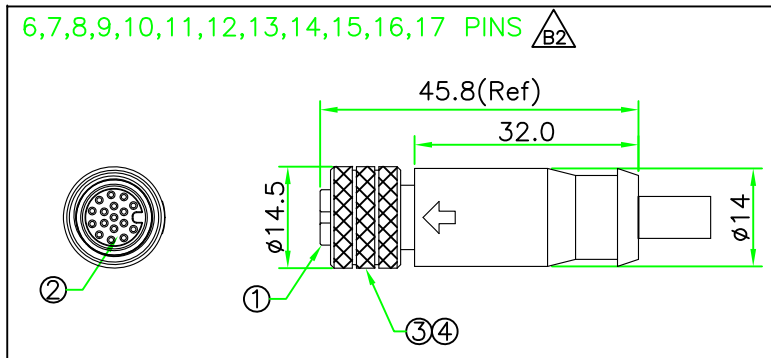

B1 B2

*Cable specification and length can be customized.

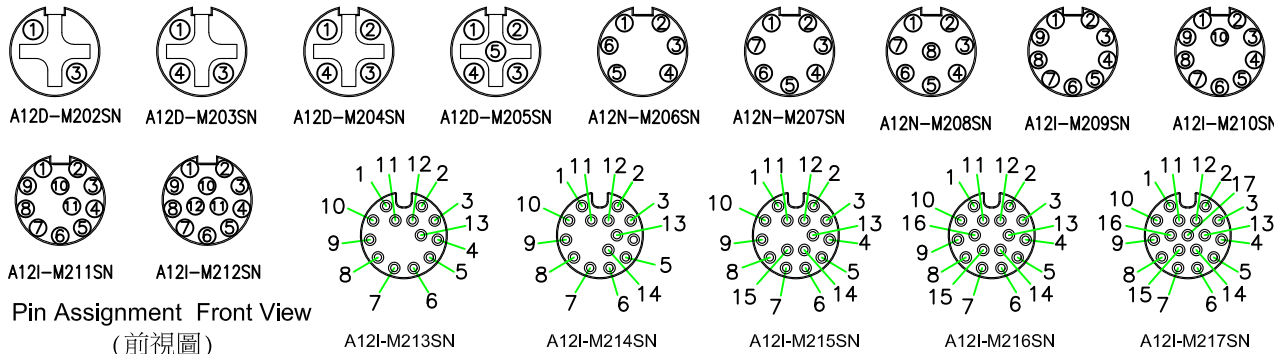

4	RING NUT	Brass, Nickel Plated.		1	
3	O-RING	VITON	BLACK	1	
2	CONTACT	Brass , 6u" Gold Plated. Female Pin.		N	
1	CONNECTOR	M12 A-Coding Female Connector Insert, NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

REV.	DESCRIPTION	DATE
A	ISSUE	Dec/22/2009
B	Add 12 Poles.	Jan/11/2010
B1	Add Item.	May/11/2015
B1	Add 17 Poles.	Sep/23/2022

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 1.5A / 2A / 4A

TEMPERATURE RANGE: -20°C TO +80°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: A12x-M2xxSN

02 - 2 PINS 10 - 10 PINS

03 - 3 PINS 11 - 11 PINS

04 - 4 PINS 12 - 12 PINS

05 - 5 PINS 13 - 13PINS

06 - 6 PINS 14 - 14 PINS

07 - 7 PINS 15 - 15 PINS

08 - 8 PINS 16 - 16 PINS

09 - 9 PINS 17 - 17 PINS

I - CURRENT RATING 1.5A

N - CURRENT RATING 2A

D - CURRENT RATING 4A

HOLIN® HTP ASIA TECHNOLOGY CO., LTD.
禾凌科技股份有限公司

	UNIT: mm	TITLE :	M12 A-Coding Female Molded Cable Ass'y
SCALE	1:1	P/N:	A12x-M2xxSN
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX ± 1.0 .X ± 1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1'		DWG.NO:	A12x-M2xxSN
REV.	SHEET		
B2	1/1		