




RoHS

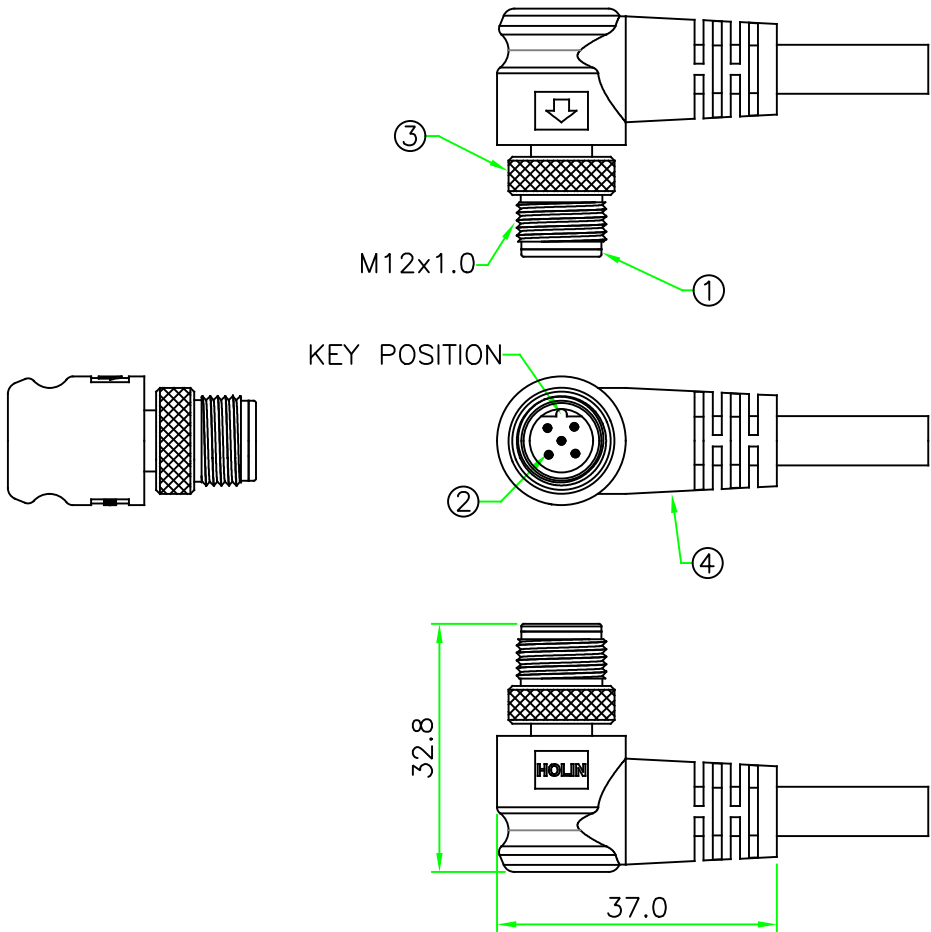

REV.	DESCRIPTION	DATE
A	ISSUE	Dec/19/2024

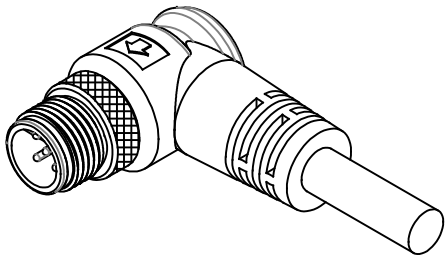

- NOTES:
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 4A
TEMPERATURE RANGE: -20°C TO +80°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - HOW TO ORDER: B12D-M1xxRM
03 - 3 PINS
04 - 4 PINS
05 - 5 PINS

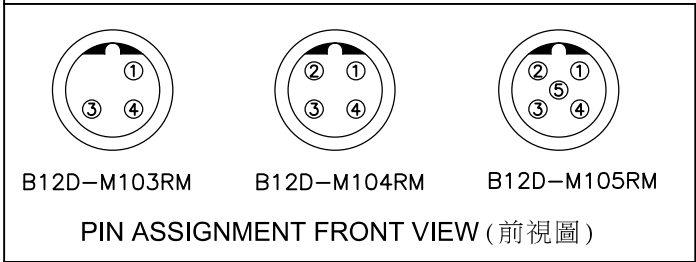

*Cable specification and length can be customized.

4	OVERMOLD	PU or PVC.	BLACK	1	90-135
3	RING NUT	Brass, Nickel Plated.		1	
2	CONTACT	Brass, 6 u" Gold Plated. Male Contact.		N	
1	CONNECTOR	M12 B-Coding Male Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

HOLIN® HTP ASIA TECHNOLOGY CO., LTD. 禾凌科技股份有限公司					
		UNIT: mm	TITLE : M12 B-Coding Male R/A Molded Cable		
SCALE		1:1			
UNLESS OTHERWISE SPECIFIED TOLERANCES: XX. ± 1.0 .X ± 1.0 .XX ± 0.5 .XXX ± 0.25 ANGLE ± 1°		P/N: B12D-M1xxRM		DR. SIBYL	
REV. A		SHEET 1/1		CH. JAMES	
		DWG.NO: B12D-M1xxRM		AP.	